

Gmail

99+
Mail

Compose

21,418
Inbox

Starred

Snoozed

Important

Sent

80
Drafts

Categories

More

Labels +

Notes

Catatan Harian Prodi

Parking Service Management with Hybrid Code Technology (HCT) X

Navigation icons: back, forward, refresh, delete, archive, search, etc.

[ICSECC] Results of Paper Review and Inspection Inbox x



Secretariat of ICSECC <icsecc@president.ac.id>
to ninaherlina, me, firmansyah

Dear Author(s),

we have reviewed and inspected your final manuscript (FM). Attached please find the result of your FM review and inspection. Plea FM.

We send also the conference template, for your reference.

Please indicate the changes you made to your FM by using **YELLOW/BLUE HIGHLIGHTS**. Please send the improved FM (or FM2 example: FM2.088.doc.

Upon receiving, we will check your FM2. Please be reminded, that only papers that follow the checklist will proceed to the publicati

Best regards,
ICSECC Publication Chair

5 Attachments • Scanned by Gmail

<p>sed 0.1 V to 0.6 V DC/I</p> <p>Uditya Tyagi, Ch. Gopi, Prayank Baldi and Amintul I... Department of Electronics and Communication Engineeri... Birla Institute of Technology, Mesra Kanchi, West Bengal, India uimesra.ac.in, gopi_chalmalis@yahoo.co.in, prayank...</p>	<p>Economic Analysis of deployment of DC power and Appliances along with Solar in urban multi-storied buildings</p>	<p>Paper Title* (use style: paper title)</p>	<p>01. Conference-t...</p>
---	---	--	----------------------------



NURUL HIRON <hiron@unsil.ac.id>
to FIRMANSYAH

5 Attachments • Scanned by Gmail

Paper number	Paper number	085
Email	Email	ninaherlina@unsil.ac.id; hiron@unsil.ac.id; firmansyah@unsil.ac.id;
Paper title	Paper title	Parking Service Management with Hybrid Code Technology (HCT)
Title Format, Abstract writing, keywords	<p>1) Format of FM must be according to conference template: font size, length of abstract, number of keywords.</p> <p>2) Abstract must contain conclusion.</p> <p>3) Maximum number of keywords 5.</p> <p>4) No repetition of word for the title</p>	OK.
Name of authors (combine authors with identical affiliation)	<p>For the same affiliation, combine multiple authors in one column.</p> <p>More than 1 email address can be written on the last line</p>	<p>All authors come from the same affiliation. Please combine into 1 column.</p> <p>All email address can be listed in 1 line.</p>
Fonts according to template	In general, the section title, body of the paragraph, figure caption, table caption, size and type of fonts, must follow the template of the conference.	OK.
Equations writings	<p>1) The way to write the equation must follow the conference template with center alignment for equation and equation number right justified,</p> <p>2) Equations may not be in the form of screenshot, but equations must be typed using Word alphabet, Equation Editor, or Equation Tools</p>	No equation. OK.
Picture resolution and font size inside picture	<p>1) Pictures/figures must be of high resolution,</p> <p>2) Font size used inside the picture/figure must be equal to Times New Roman size 7 and readable.</p>	Increase font size inside Fig.1 and Fig.2, so that the text inside the figure can be read easily.
Figure caption and Table caption to be consistent in text	<p>1) Consistency in referring, if in caption the author uses Figure, then in paragraph body the citation must be Figure, too. If in caption the author uses Fig., then in citation should use Fig, too.</p> <p>2) Size and style of caption for Figure and Table must be Times New Roman size 8 (according to template)</p> <p>3)The numbering of Figure uses italic</p>	OK.

	number (1,2,3), the numbering of Table uses roman number (I,II,III), for example Fig. 1 or Figure 1, Table I)	
Figure/Table must first found in text before they appear	<p>1) Figure and Table must first be mentioned in text before the Figure and Table appears in the paper.</p> <p>2) Referring to Figure/Table must directly use their number, not using words such as "next table", "the following table", and so on...,</p> <p>3) Each Figure/Table must be mentioned at least 1 time in the paper,</p> <p>4) Table and Figure should be placed not too far from the place where they are referred to inside the body of the paragraph</p>	Already OK.
Writing the reference (style, order of appearance)	<p>1) Check whether the writing of the references already follows the IEEE style,</p> <p>2) Reference must be cited in order of appearance</p> <p>3) Maximum 25% Indonesian references. The rest must be in English.</p>	OK.
Updated reference must be used (last 3 years)	Paper must contain citations which are published in the last 3 years (references must update, proven by including papers/journal/books which are 3 years old or less)	2 from 2017, 1 from 2016. OK.
English Writing and Grammar	<p>The general assessment of the English level of the paper. Acceptable or not?</p> <p>The committee can help by providing professional proof reader (sworn translator) with the price of Rp100.000/page.</p> <p>The author is suggested to provide proof read by himself/herself.</p> <p>Publication may be rejected if there is no significant improvement in level of English writing.</p>	OK.
Number of pages (minimum 4, maximum 6)	The paper must be at least 4 pages but maximum 6 pages.	The paper is less than 4 pages. Some text must be added so that the paper can be at least 4 pages.
Conclusion does not have to be	Check the writing and the content of Conclusion section.	OK.

with recommendation (reformulate recommendation)	It should be written in style of research conclusion, but not in style of a thesis conclusion, final project conclusion.	
70% of the reviewer inputs must be accommodated in Final Manuscript	Final manuscript (FM) must accommodate at least 70% of reviewers' input, if the FM is compared to the Review manuscript (RM)	Please follow the input from reviewer, as given as comments in the attached document.
The revised final manuscript must include highlights of changes made by author	<p>Author must send back the improvement of FM, named FM2 to icsecc@president.ac.id.</p> <p>Author MUST give highlights to parts where the author conducts the improvement, showing the difference between FM2 and the previous FM.</p>	<p>Above are the inputs from the Publication Chair of the ICSECC Conference.</p> <p>Please conduct the review of your final manuscript (FM) according to the items mentioned above.</p> <p>You now have 7 days to revise your paper according to the input. Please send again your revised final manuscript (FM2) to icsecc@president.ac.id.</p> <p>IN THE FM2, PLEASE SHOW THE CHANGES THAT YOU MADE BY GIVING YELLOW HIGHLIGHTS TO THE CHANGES</p> <p>Your paper will proceed to publication phase only after it passes the checklist of the Publication Chair.</p>
Document Format	<p>Submitted FM must be in DOC, may not be in other format.</p> <p>DOCX or PDF is not acceptable.</p>	OK.

Parking Service Management with Hybrid Code Technology (HCT)

Nina Herlina

Civil Department of *Civil Engineering*
Faculty of *Engineering*
Siliwangi University
Indonesia
ninaherlina@unsil.ac.id

Nurul Hiron

Electrical Department of *Electrical Engineering*
Faculty of *Engineering*
Siliwangi University
Indonesia
hiron@unsil.ac.id

Abstract— Technology-based parking service management is an essential requirement in the parking service industry. The main obstacle in a parking service is the improper use of technology such as a server that is not working; the computer network at the gate is not coordinating well, thus making consumers dissatisfied. This paper proposes a solution in the form of technology to support parking services using Hybrid Code Technology (HCT) in billing receipts. The method used is barcode design on billing receipts, so that the parking service system can still provide optimal service when the network is lost. The results of this paper have successfully designed Hybrid Code Technology (HCT) for use in parking services. HCT consists of a unique code that can be used as a feature to distinguish whether a vehicle enters a parking area under normal conditions or when the system fails to work so that even when the computer network is not working, transaction identities can still be saved to the server.

Keywords—Hybrid, parking, technology, service.

I. INTRODUCTION (HEADING 1)

Computer technology is the backbone of a large scale parking service. Reliable computer networks will provide service performance to continuous parking consumers. A company that operates a parking service has a great responsibility for the smooth service and security of parked vehicles. Therefore an excellent parking service payment system will have an impact on the efficiency of parking services [1]. Therefore parking services must pay attention to be timeliness, accuracy, reliability, security, and be able to provide security, a reliable reporting system, and detection of the presence of vehicles in the parking zone [2].

Parking technology is currently developing rapidly. The goal of the technology is sensing accuracy and speed of customer service. Vehicle detection technology such as Radio Frequency Identification (RFID) [4] is also used in parking services and services can run immediately [5], Parking Guidance Information Systems (PGIs) [6], [2], [7], parking system with Programmable Logic Controller (PLC) [8] reservation-based system for parking [9], smart parking parking [3], parking system with NFC technology [10], [11], parking system with wireless sensor network (WSN) [6] parking system with Zigbee technology [12], parking system with image processing technology [13] [14], [15], [16], [17].

Generally, a parking service consists of an entrance gate and an exit gate. The entrance gate is the gate where the vehicle enters the parking area, usually characterized by a vehicle barrier, while the exit gate is the gate where the vehicle leaves the parking area. At the entrance gate, the vehicle number and time are generally entered by the officer to the computer, and then the entrance gate computer sends data to the server, the server generates the transaction number and sends back to the entrance gate computer to

instruct the manless machine to open the barrier. Menless will then print a receipt containing the transaction number and give the receipt to the consumer.

When the consumer vehicle exits the parking area, the customer will provide transaction receipt to the officer at the exit gate, and the officer will scan transaction data through the scan engine and then the computer will retrieve data from the server to display on the exit gate computer. The officer will then validate it by matching the number of the vehicle that came out with the data that is on the computer. If all the data available is suitable, then the parking bill will be given to the consumer. After the customer makes a payment, the exit barrier will open, and the customer's vehicle may exit the parking area.

The service system, as described above, can run well as long as the computer network system is not problematic working properly. In addition to that, in order for the system to work, the computer coordination between the entrance gate and exit gate should communicate with the server smoothly.

The problem occurs if the computer network is cut off. Most often, while consumers do not care about the problem and demand that hope the parking service runs well, and the entrance gate and exit gate run smoothly. Thus, however, in conditions where the computer network is not running well, the server cannot be accessed, then a solution is needed so that the parking service can work on the condition that the server is inaccessible or the network fails to work.

This paper proposes a solution so that parking consumer services can run smoothly on the condition of a computer or server network failing to be accessed by an entrance gate or exit gate computer.

II. METHODE

The proposed method is to create a unique code design in the form of a barcode that will be printed on the parking service transaction receipt. This unique code is generated by the computer for two different conditions, namely when the computer network runs well and when the computer network fails to work, or the server cannot be accessed.

The flow of service procedures at the gate entry and gate entry is observed to create a barcode with a unique code during normal network conditions (online), and engineering is also carried out to obtain a barcode engineering with a unique code when the network has a problem (offline).

Hybrid Code Technology (HCT) design is designed on a computer network by involving one entry gate and one entrance gate with one server unit as a data storage center of each computer. It is assumed that the network uses cable.

Commented [i-1]: Revised the format

Commented [i-2]: Authors just need to write a numerical results instead of explanation results

Commented [i-3]: English must be improved

Commented [i-5]: Briefly explain what is the solution!!!

Commented [i-6]: This kind of technology has been builded along time ago also this system will make the process more complicated and more expensive since a barcode reader is needed., how do yu explain about this???

Commented [i-4]: An automatic system has been developed, the authors need to improved your literature study!!!

Then interference will be given to the network path so that computers from the entrance gate and exit gate cannot communicate with the server.

III. RESULT AND DISCUSSION

Fig.1 shows the architecture of computer network systems in general parking services. The network system consists of a server and a computer as a client. The client is a computer that is at the entrance gate station and exit gate station. At the entrance gate station consists of a computer, this computer indicates the number of the entrance gate in a parking system. The number of entrance gates is proportional to the number of computers provided at the gate of the station.

At the exit gate station consists of a computer, this computer indicates the number of exit gate in a parking system. The number of exit gates is proportional to the number of computers provided at the station's exit gate.

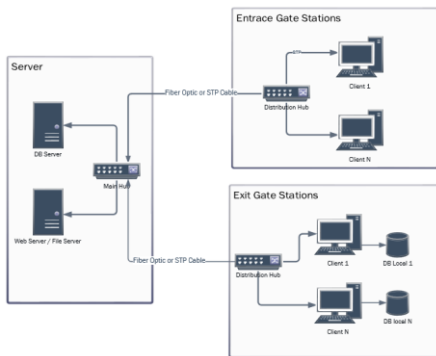


Fig.1. The architecture of Hybrid Code Technology (HCT) for online condition

Fig.2. Indicates a disrupted computer network system, so that computers at the station's entrance gate and exit gate station can not access the server. Disturbances like this in parking service technology in general usually make the entrance gate station and exit gate station unable to serve consumers. Consumers can go out or enter, but the billing data and parking bill calculation do not occur, therefore with Hybrid Code Technology (HCT) service can run well during computer network communication disruptions.

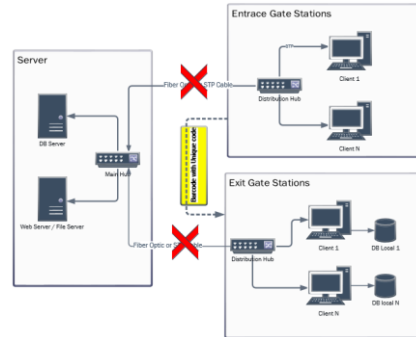


Fig.2. The architecture of Hybrid Code Technology (HCT) for offline condition

Fig.3 shows the workflow of the parking service at the entrance gate under normal (online) computer network conditions, where the server can be accessed by the entrance gate computer and interference does not occur. The initial procedure of Hybrid Code Technology (HCT) begins with the consumer pressing a button or placing a subscription parking card on the ~~manless machine~~ machine. The system will validate and store customer transaction data to a server which then ~~manless machine~~ will provide a transaction receipt through the printer machine and command the barrier gate to open.

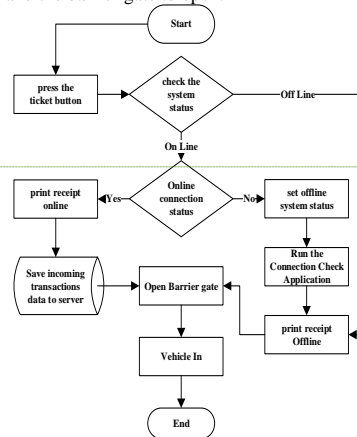


Fig.3. Flowchart of Hybrid Code Technology (HCT) for the entrance gate procedure

Fig.4 is a flow of parking service with the implementation of Hybrid Code Technology (HCT). When the vehicle exits the parking lot, the customer scans the parking ticket. The system will verify the transaction receipt or parking ticket to validate whether there is a unique code on the customer's ticket that is printed when the system is offline or online. The computer at the exit gate will check the system status. If the system is online, the transaction will be directly saved to the server after the billing calculation is

Commented [AP8]: ?

Commented [i-7]: All figure quality and font size are not excepted, the qualities must be improved and the font size must be increased!!!!

done. If the system is offline, the transaction will be temporarily stored in the exit gate station database. This treatment occurs as long as the entrance computer or exit gate computer can not access the server. Then if the server can be reaccessed (online), automatically, all billing transaction data at the exit gate station will be sent to the server.

Hybrid Code Technology (HCT) will save many transaction data that occurs during a disrupted parking service system. In a more extensive parking service system, Hybrid Code Technology (HCT) can be multiplied at each gate entry and exit.

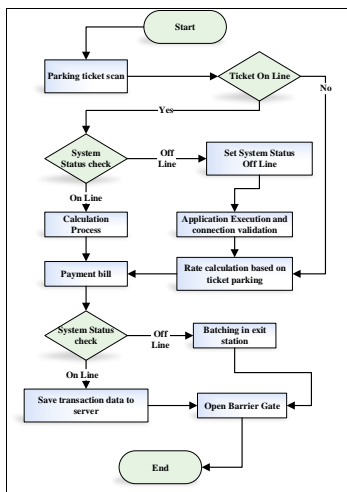


Fig.4. Flowchart of Hybrid Code Technology (HCT) for gate exit procedure

A barcode proposed in this paper as part of Hybrid Code Technology (HTC) consists of the company brand, header text, entrance gate station code, entrance date and time, unique code, ticket number, entrance number, entrance gate station code, company domain, and greeting and warning (Fig. 5).



Fig.5. Hybrid Code Technology (HCT) barcode design for online condition



Fig.6. Hybrid Code Technology (HCT) barcode design for offline condition

Fig.5 shows a barcode design with a unique code as a sign of whether the vehicle entered in the offline system. The entrance gate is the vehicle entrance code gate. From this code, the system will find out which gate number the customer is traversing. Entrance gate and time help the system know the time the vehicle is starting to get parking services. The ticket number is a parking service transaction number, and unique code is a sign that shows that the customer's vehicle is serviced at the time the system condition is interrupted (offline) or not interrupted (online). In this paper, it is illustrated that on the online conditions are marked with a unique code of the number "01" (Fig. 5), while the offline conditions are marked with the number "09" (Fig. 6). The code will help the system can still calculate payment and parking services when the system is in trouble with computer network interruptions.

IV. CONCLUSIONS

The proposed Hybrid Code Technology (HTC) is a solution for parking services that use computer technology that is integrated with the server. HTC works especially at the time, when the computer network system at the entrance gate and exit gate can not access the server.

Hybrid Code Technology (HTC) with unit code on the barcode printed on the transaction receipt becomes the media to provide a unique code which means that the customer is served on a reasonable condition with an online computer network system. This also means meaning that it can communicate with the server or offline, or during the condition when meaning the computer cannot communicate with the server.

Hybrid Code Technology (HTC) can be built on conventional parking management systems as long as the system uses computer technology in coordination with the server.

ACKNOWLEDGMENT

The authors are very grateful to Kemenristekdikti for financial support by grant research to accomplish this work and The authors also gratefully acknowledge the helpful comments and suggestions of the reviewers, which have improved the presentation.

REFERENCES

- [1] D. Fadjev, "Method for Evaluating Economic Efficiency of Parking Management Tools," *Transp. Res. Procedia*, vol. 20, no.

Commented [i-9]: The literature study with published in the last three years absolutely need!!!

- September 2016, pp. 193–199, 2017.
- [2] R. Ranjini and D. Manivannan, "A Comparative Review on Car Parking Technologies," *Int. J. Eng. Technol.*, vol. 5, no. 2, pp. 1763–1767, 2013.
- [3] F. Shaikh, B. S. Nikhilkumar, O. Kulkarni, P. Jadhav, and S. Bandarkar, "A Survey on ' Smart Parking ' System," *Int. J. Innov. Res. Sci. Eng. Technol.*, vol. 4, no. 10, pp. 9933–9939, 2015.
- [4] H. M. M. El-hageen, K. Ibrahim, M. Ata, A. Chesoh, and H. Jaafar, "Radio Frequency Identification (RFID) Indoor Parking Control System," *Int. J. Sci. Eng. Res.*, vol. 8, no. 11, pp. 557–562, 2017.
- [5] M. R. M, P. A. P, and K. P. H, "RFID Technology for Parking," in *International Conference on VLSI, Communication & Instrumentation (ICVCI) 2011*, 2011, no. 1cvc1, pp. 14–16.
- [6] M. Patil and V. N. Bhonge, "Wireless Sensor Network and RFID for Smart Parking System," *Int. J. Emerg. Technol. Adv. Eng.*, vol. 3, no. 4, pp. 188–192, 2013.
- [7] Z. Pala and N. Inan, "Smart Applications."
- [8] S. Sarayu, S. S. Rajendra, and V. V. Bongale, "Design and Fabrication of Prototype of Automated Smart Car Parking System using Programmable Logical Controllers (PLC)," *Int. J. Sci. Eng. Technol.*, vol. 2, no. 9, pp. 857–860, 2013.
- [9] M. Patil and R. Sakore, "Smart Parking System Based On Reservation," *Int. J. Sci. Eng. Res.*, vol. 2, no. 6, pp. 21–26, 2014.
- [10] H. A. Al-ofeishat and M. A. A. L. Rababah, "Near Field Communication (NFC)," *IJCSNS Int. J. Comput. Sci. Netw. Secur.*, vol. 12, no. 2, pp. 93–99, 2012.
- [11] A. Radhakrishnan, "OPEN ACCESS NFC based parking payment system," *J. Eng. Res. Appl.*, vol. 5, no. 6, pp. 56–59, 2015.
- [12] H. Asyrani *et al.*, "Wireless based Smart Parking System using Zigbee," *Int. J. Eng. Technol.*, vol. 5, no. 4, pp. 3282–3300, 2013.
- [13] Q. Tian, T. Guo, S. Qiao, Y. Wei, and W. Fei, "Design of Intelligent Parking Management System Based on License Plate Recognition," *J. Multimed.*, vol. 9, no. 6, pp. 774–780, 2014.
- [14] M. M. Rashid, A. Musa, M. A. Rahman, N. Farahana, and A. Farhana, "Automatic Parking Management System and Parking Fee Collection Based on Number Plate Recognition," *Int. J. Mach. Learn. Comput.*, vol. 2, no. 2, pp. 93–98, 2012.
- [15] B. Karunamoorthy, R. Sureshkumar, and N. Jayasudha, "Design and Implementation of an Intelligent Parking Management System using Image Processing," *Int. J. Adv. Res. Comput. Eng. Technol.*, vol. 4, no. 1, pp. 85–90, 2015.
- [16] H. Al-Kharusi and I. Al-Bahadly, "Intelligent Parking Management System Based on Image Processing," *World J. Eng. Technol.*, vol. 02, no. 02, pp. 55–67, 2014.
- [17] E. S. Choudhary, S. A. Thakare, S. D. Raut, K. M. Jadhao, and M. V. Tiwari, "Automatic Parking Management System and Fee Collection Based on Number Plate Recognition," *Int. J. Innov. Emerg. Res. Eng.*, vol. 3, no. 1, pp. 1–5, 2016.