

Journal Search

Search

[Journals](#) > [Submission](#) | [Payment](#) | [Articles](#) |**Paper Status**

Paper ID OSE13591P [\[download\]](#) **Date received** 2021-03-19
Title Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system
Author Mr. Nurul Hiron (Corr. Author), Nurul Hiron, Ida A D Giriantari, Lie Jasa, I Nyoman S Kumara
Status Printed

Date	Event	Detail
2021-03-19	Manuscript Submission	Confirm Mail - Sent
2021-03-19	Manuscript Submission	Confirmed by author
2021-04-15	Preliminary Check	OK
2021-04-15	Sent to the Chief Editor	
2021-04-20	Review Request	Sent to 2 reviewer(s)
2021-05-25	Review Request	Sent to 1 reviewer(s)
2021-05-25	Review Result	Good / Minor Change
2021-05-25	Final Review	Revise Required
2021-06-07	Manuscript Resubmission	Complete
2021-06-07	Final Review	Accepted
2021-06-11	Proofs in Progress	
2021-06-25	On-line Journal	Published

Techno-Press: Publishers of international journals and conference proceedings. Copyright © 2022 Techno-Press
P.O. Box 33, Yuseong, Daejeon 34186 Korea Tel: +82-42-828-7996 Fax: +82-42-828-7997 Email: info@techno-press.com



Hiron Hiron <hiron@unsil.ac.id>

Techno Press : Review result

2 messages

Techno-Press <phillseung@kaist.edu>
Reply-To: Techno-Press <phillseung@kaist.edu>
To: hiron@unsil.ac.id

Tue, May 25, 2021 at 2:19 PM

Dear Mr. Nurul Hiron.

Paper ID : OSE13591P

Title : Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

The review of your paper, listed above, has been completed and in reviewers' opinion your paper needs to be improved before the final acceptance for publication in the "Ocean Systems Engineering, *An International Journal*". For your reference, the reviewers' comments can be viewed;

Review Result 1 - [\[View\]](#)

I would like to suggest at this time that you resubmit your paper after suggested revisions are made, as outlined in the reviewer's comments. **Please send us a list of all the changes you have made, citing manuscript pages, and highlight (or use colour) the changed portion of the manuscript.** In case you do not wish to make any of suggested the changes, kindly state your reasons.

Please combine the response to the reviewers and the revised paper into a single file and then resubmit.

I would appreciate receiving your revised paper as early as possible but no later than two weeks. If you do not wish to revise your paper for some reason or you need more time to revise it, please let us know.

To resubmit; <http://www.techno-press.com/papers/?page=resubmission>

For your convenience and reference updating, a temporal access to the Techno-Press online journals will be provided. You can use your paper ID and password on the website <http://www.techno-press.org/index2.php?page=quicksearch&selectedJournal=OSE>.

Sincerely yours,

Prof. Phill-Seung Lee, Ph.D
Associate Editor, Ocean Systems Engineering, *An International Journal*

CKC/hjl

Hiron Hiron <hiron@unsil.ac.id>
To: dayu.giriantari@unud.ac.id, satya.kumara@unud.ac.id, Lie Jasa <Liejasa@unud.ac.id>

Wed, May 26, 2021 at 9:37 AM

Kepada Yth,
Tim Promotor Disertasi

Selamat Pagi kepada Ibu dan Bpk Promotor.
sebelumnya mohon maaf jika email ini dikirim pada saat Hari Raya Nyepi.
saya baru mendapatkan email terkait hasil review artikel saya. pada komentar tersebut, saya harus menandai bagian yang direvisi, tetapi saya kesulitan menemukan bagian mana yang harus direvisi. karena setelah saya lihat dari hasil review, hanya ada komentar perbaikan tata bahasa inggris saja, tetapi tidak spesifik bagian yang mana.
mohon kiranya Bpk/Ibu promotor dapat memberikan arahan kepada saya.
terimakasih sebelumnya.

Hormat saya,

Hiron
buka email ini 10 menit yang lalu.

[Quoted text hidden]



Hiron Hiron <hiron@unsil.ac.id>

Techno Press : Review result

1 message

Techno-Press <phillseung@kaist.edu>

Mon, Jun 7, 2021 at 2:32 PM

Reply-To: Techno-Press <phillseung@kaist.edu>

To: hiron@unsil.ac.id

Dear Mr. Nurul Hiron.

Paper ID : OSE13591P

Title : Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

I am pleased to inform you that your paper listed above has been accepted for publication in the "Ocean Systems Engineering, *An International Journal*".

For the final editing by Techno-Press, we need to have the manuscript in the MS Word format (**use 2007 or later version**). Please prepare the final manuscript in MS format strictly in accordance with the Guidelines given at; http://www.techno-press.com/papers/Instructions_to_Authors.pdf (including Appendices) and send your final manuscript through;

<http://www.techno-press.org/papers/?page=finalsubmission>

It is very important to note that failure to comply with the Guidelines in preparing MS Word file **may cause the delay in publication of your paper**.

Once the MS word file arrives to us, your paper will be forwarded to the publishers, and you will hear directly from Techno-Press in the near future as to the galley proofs and the scheduling of publication.

Sincerely yours,

Prof. Phill-Seung Lee, Ph.D

Associate Editor, Ocean Systems Engineering, *An International Journal*

CKC/hjl



Hiron Hiron <hiron@unsil.ac.id>

Techno Press : Please confirm your submission

3 messages

Techno-Press <ose@techno-press.com>
Reply-To: Techno-Press <ose@techno-press.com>
To: hiron@unsil.ac.id

Fri, Mar 19, 2021 at 6:41 PM

Dear Mr. Nurul Hiron:

Thank you very much for submitting your manuscript to "Ocean Systems Engineering, *An International Journal*". Your paper has been given a reference ID and Password as below.

Title : Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system
Your Paper ID : OSE13591P
Password : NHiron03

Please use the ID in the all future communications.

When you inquire the status of this submission, visit the website; <http://www.techno-press.org/papers> and enter your reference ID and the password above.

Please click the link below to confirm that you received this message. **(If you do not, the submission may not be completed.)**

<http://www.techno-press.org/papers/?page=status&code=OSE13591P&hashkey=e5da4b308359dfe99c1c8cac055a6c4d>

After preliminary check, the manuscript will be sent to the designated Editor-in-chief and undergo the peer review process under his responsibility. You will hear from us (or designated Editor) as soon as the review has been completed. In the meantime, if the preliminary reviewer has any suggestions to improve your paper or reject, you will be informed.

Thank you again for your interest in the journal and look forward to your enjoyable association with the "Ocean Systems Engineering, *An International Journal*".

Chang-Koon Choi, Ph.D
Manuscript Manager, Techno Press

P.O. Box 33, Yuseong-gu Daejeon 305-600 Korea
Tel: (+82-42) 828-7995/6, Fax : (+82-42) 828-7997, E-mail: ose@techno-press.com

Hiron Hiron <hiron@unsil.ac.id>
To: Techno-Press <ose@techno-press.com>

Thu, May 27, 2021 at 2:53 PM

Dear
Mr. Chang-Koon Choi, Ph.D

I feel very happy about the results of the review of this article, I will immediately revise it especially on proofreading as soon as possible.
Thank you.

Sincerely your,

Hiron
[Quoted text hidden]

Hiron Hiron <hiron@unsil.ac.id>
To: Techno-Press <ose@techno-press.com>

Mon, Jun 7, 2021 at 12:58 PM

Dear
Mr. Chang-Koon Choi, Ph.D

I already re-submit my article (ID.OSE13591P).
Thank you

Sincerely your,

Hiron

TECHNO | PressTp_Editing System.E (TES.E)

<http://www.techno-press.com/>

- Resubmission -

Step 1 Title and Keywords	Step 2 (under construction)	Step 3 Authors & Affiliations	Step 4 Manuscript Upload	Step 5 Editor, Reviewers and Messages	Step 6 Summary/Confirmation	Step 7 Finish
------------------------------	--------------------------------	-------------------------------------	-----------------------------	---	--------------------------------	--------------------------

Step 7 - Finished

Congratulations !

Your resubmission has been completed.

Thank you.

Techno-Press: Publishers of international journals and conference proceedings. Copyright © 2021 Techno Press
P.O. Box 33, Yuseong, Daejeon 34186 Korea, Tel: +82-42-828-7996, Fax : +82-42-828-7997, Email: info@techno-press.com

[Quoted text hidden]

Referee's Report (Reviewer 1)

Paper No. OSE13591P

Title Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

Author Mr. Nurul Hiron

I. CONTENTS**1. Type of paper :**

- Theoretical research
- Experimental research
- Review of existing technique
- Other

2. Originality :

- Original work
- Minor extension of known technique
- Nothing specially new
- Other

3. Significance :

- High value of current interest
- Marginal value of current interest
- No significant value
- Other

4. Completeness :

- Complete
- Omission of important part (specified in IV)
- Contains unnecessary portion (specified in IV)
- Other

5. Comprehensibility :

- Well written, Easily understood
- Several reading are needed to understand
- Virtually unreadable (need rewriting by a native English speaker)

6. Details (If No, please specify in IV) :

yes / no

- / Adequacy of title?
- / Adequacy of summary & conclusions??
- / Adequacy of length?
- / Adequacy of references?

II. OVERALL RATING

- Poor
- Marginal
- Average
- Good
- Excellent

III. RECOMMENDATION

- Accept as is
- Accept if minor revisions are made (REREVIEW unnecessary)
- Accept only if required revisions are made (REREVIEW necessary)
- Reject (reasons specified in VI)

IV. COMMENTS

VAWT turbine study techniques in OWC systems are still very rarely observed by researchers. This article presents interesting results and ANSYS simulation results presenting dynamic wind speed and pressure. This article is interesting with the presentation of data that is quite interactive. Simulation results show interesting and comprehensive data.

V. MARKED MANUSCRIPT

none

Techno-Press: Publishers of international journals and conference proceedings. Copyright © 2022 Techno Press
P.O. Box 33, Yuseong, Daejeon 305-600 Korea, Tel: +82-42-828-7995, Fax : +82-42-828-7997, Email: technop@chol.com

Referee's Report (Reviewer 2)

Paper No. OSE13591P

Title Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

Author Mr. Nurul Hiron

I. CONTENTS**1. Type of paper :**

- Theoretical research
- Experimental research
- Review of existing technique
- Other

2. Originality :

- Original work
- Minor extension of known technique
- Nothing specially new
- Other

3. Significance :

- High value of current interest
- Marginal value of current interest
- No significant value
- Other

4. Completeness :

- Complete
- Omission of important part (specified in IV)
- Contains unnecessary portion (specified in IV)
- Other

5. Comprehensibility :

- Well written, Easily understood
- Several reading are needed to understand
- Virtually unreadable (need rewriting by a native English speaker)

6. Details (If No, please specify in IV) :

yes / no

- / Adequacy of title?
- / Adequacy of summary & conclusions??
- / Adequacy of length?
- / Adequacy of references?

II. OVERALL RATING

- Poor
- Marginal
- Average
- Good
- Excellent

III. RECOMMENDATION

- Accept as is
- Accept if minor revisions are made (REREVIEW unnecessary)
- Accept only if required revisions are made (REREVIEW necessary)
- Reject (reasons specified in VI)

IV. COMMENTS

This article is interesting with the presentation of data that is quite interactive. Simulation results show interesting and comprehensive data. The results contain facts about the performance of the VAWT turbine in OWC which need further development

V. MARKED MANUSCRIPT

none

Techno-Press: Publishers of international journals and conference proceedings. Copyright © 2022 Techno Press
P.O. Box 33, Yuseong, Daejeon 305-600 Korea, Tel: +82-42-828-7995, Fax : +82-42-828-7997, Email: technop@chol.com

Referee's Report (Reviewer 3)

Paper No. OSE13591P

Title Fish-Ridge Turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

Author Mr. Nurul Hiron

I. CONTENTS**1. Type of paper :**

- Theoretical research
 Experimental research
 Review of existing technique
 Other

2. Originality :

- Original work
 Minor extension of known technique
 Nothing specially new
 Other

3. Significance :

- High value of current interest
 Marginal value of current interest
 No significant value
 Other

4. Completeness :

- Complete
 Omission of important part (specified in IV)
 Contains unnecessary portion (specified in IV)
 Other

5. Comprehensibility :

- Well written, Easily understood
 Several reading are needed to understand
 Virtually unreadable (need rewriting by a native English speaker)

6. Details (If No, please specify in IV) :

yes / no

- / Adequacy of title?
 / Adequacy of summary & conclusions??
 / Adequacy of length?
 / Adequacy of references?

II. OVERALL RATING

- Poor

- Marginal
- Average
- Good
- Excellent

III. RECOMMENDATION

- Accept as is
- Accept if minor revisions are made (REREVIEW unnecessary)
- Accept only if required revisions are made (REREVIEW necessary)
- Reject (reasons specified in VI)

IV. COMMENTS

The research topic is interesting. The paper is well organized, so it is also well-written to make it easy to understand. There are a few places where English expressions are grammatically wrong. If you go through proofreading in English, it is judged that the paper is worth enough to be published in this journal.

V. MARKED MANUSCRIPT

none



Hiron Hiron <hiron@unsil.ac.id>

corrected set of proofs and completed Copyright Transfer Form (ID.OSE13591P)

3 messages

Hiron Hiron <hiron@unsil.ac.id>
To: Techno-Press <ose@techno-press.com>

Fri, Jun 11, 2021 at 9:00 PM

Dear
Mr. Chang-Koon Choi

Attached please find one set of proofs of my article correction (in a green note in pdf file) and please pay attention to the title on the header note.

Sincerely yours,

Hiron

2 attachments **OSE13591P_edit.pdf**
2030K **COPYRIGHT TRANSFER-OSE.pdf**
85K

OSE <ose@techno-press.com>
To: Hiron Hiron <hiron@unsil.ac.id>

Mon, Jun 14, 2021 at 7:16 AM

Dear Dr. Hiron:

Thank you for your email.

Please find attached the revised paper.

We would like to ask you it is OK with you, We will publish as it is.

We are looking forward to hearing from you soon.

Sincerely yours,

Ms. H. J. Lee

Technical Editor

[Quoted text hidden]

 OSE13591P_galley.pdf
2016K

Hiron Hiron <hiron@unsil.ac.id>
To: OSE <ose@techno-press.com>

Mon, Jun 14, 2021 at 7:45 AM

13/8/2021

Universitas Siliwangi Mail - corrected set of proofs and completed Copyright Transfer Form (ID.OSE13591P)

Dear

Ms. H.J.Lee

I thinks it all just OK

Thanks you

Sincerely yours,

Hiron.

[Quoted text hidden]



Hiron Hiron <hiron@unsil.ac.id>

[Ocean Systems Engineering] Galley Proofs & Copyright Transfer Form (OSE13591P)

1 message

OSE <ose@techno-press.com>
To: hiron@unsil.ac.id

Fri, Jun 11, 2021 at 9:13 AM

Dear Dr. Ouargli:

June 11, 2021

RE: Fish-ridge wind turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

Attached please find one set of proofs of the article above for your correction. Please return the corrected set of proofs and completed Copyright Transfer Form within 48 hours of receipt by E-mail (ose@techno-press.com) or FAX.[Fax Number (+82 -42) 350-8450]. Also please be reminded that at this time, only corrections to the typographical errors are allowed.

Your paper has been scheduled for publication in the June issue of "Ocean Systems Engineering, An International Journal" Vol. 11, No. 2, 2021. If we do not hear from you about the corrections on the galley proofs within 48 hours, may we proceed with publication of your paper without any corrections.

Thank you in advance for your cooperation.

Sincerely yours,

Chang-Koon Choi

Editor-in-chief

Attachments: [Ocean Systems Engineering] Galley Proofs & Copyright Transfer Form OSE13591P)

2 attachments**COPYRIGHT TRANSFER-OSE.DOC**
36K**OSE13591P_edit.pdf**
2013K

Fish-ridge wind turbine aerodynamics characteristics in Oscillating Water Column (OWC) system

Nurul Hiron^{*1,2}, Ida A.D. Giriantari^{2a}, Lie Jasa^{2b} and I. Nyoman S. Kumara^{2c}

¹Department of Electrical Engineering, University of Siliwangi, Jl Siliwangi 24, Tasikmalaya, Indonesia

²Department of Electrical Engineering, University of Udayana, PB. Sudirman, Bali, Indonesia

(Received March 19, 2021, Revised June 5, 2021, Accepted June 7, 2021)

Abstract. This paper analyzes the fish-ridge type wind turbine performance and characteristics of energy extraction applied in a low wave Oscillating Water Column (OWC) system. This article contributes to providing a better understanding of the application of OWC and VAWT in a low wave environment. The aerodynamic characteristics of the three-blade fish-ridge turbine in an OWC chamber have been successfully investigated. CFD simulation with Reynolds-Averaged-Stokes (RANS) equations was used to obtain airspeed and air pressure contours under compressed and decompressed conditions in the turbine blades. Experiments on laboratory scale test rig also obtained data. The blade torque and turbine power coefficient at different AoA were validated through the experimental test to obtain numerical equations for the relationship between airspeeds, torque, tip speed ratio, and turbine power. The turbine design was 0.2 m long and 0.1 m wide and with an overlap ratio of 15%. The maximum tested airspeed was 20m/s. We found that the fish-ridge turbine has a homogeneous air velocity distribution and pressure due to the 15% overlap area. The maximum efficiency of the fish-ridge turbine under compressed conditions was 30% at TSR 0.9, while under decompressed conditions, the maximum efficiency reached 28% at TSR 0.6.

Keywords: wind energy; wind turbine; oscillating water column; CFD; dynamic wind effects; pressure distribution; RANS equations; Navier-Stokes equations

1. Introduction

In a system with oscillating water column (OWC) technology, turbines play an essential role in converting ocean wave energy into electrical energy. We believe that the ocean is an unlimited natural resource (Hiron *et al.* 2019). Turbine performance measures are generally seen from the power coefficient (CP) (Kavade and Ghanegaonkar 2020) and the torque coefficient (CT). The higher the CP value, the better the turbine efficiency. Several aerodynamic resistance factors influence the Vertical Wind Axis Turbine (VAWT) efficiency. They are the number of blades, weight of the material, and distribution of airspeeds required of the turbine blade. Generally, the turbine's efficiency is between 20% and 30% (Sobczak *et al.* 2020).

*Corresponding author, Ph.D. Candidate, E-mail: hiron@unsil.ac.id

^a Ph.D., E-mail: dayu.giriantari@unud.ac.id

^b Ph.D., E-mail: liejasa@unud.ac.id

^c Ph.D., E-mail: satya.kumara@unud.ac.id

VAWT applied in an OWC system has been used to extract low wind speeds (Lipian *et al.* 2020). The VAWT generally has a maximum CP at TSR = 0.8 to 1.02 (Bachtiar 2019) (Yao *et al.* 2019), (Chen *et al.* 2016), which means it works at low airspeeds, while Horizontal Wind Axis Turbine (HAWT) are generally designed for high airspeeds (Matoug *et al.* 2020).

A two-blade Savonius-type VAWT in an OWC system at low waves yielded CP=20%, while a fish-ridge turbine in an OWC system resulted in CP = 24.5% (Hiron *et al.* 2019). Therefore, many researchers have proposed different designs so that the CP can exceed 20%.

The works reported in this paper investigate a fish-ridge turbine performance based on the turbine model proposed by Song *et al.* (2013). The focus of observations is on the aerodynamic characteristics of the turbines under compressed and decompressed conditions in an OWC system. There is little information regarding this area in the literature. The parameters observed are CP (Lipian *et al.* 2020), torque coefficient (CT) (Agbormbai and Zhu 2020), turbine rotation (rpm), wind power, and turbine power against the angle of attack (AOA). Here, we propose a modified turbine fish-ridge with an overlap ratio (OR) of 15%. This turbine design associated with turbine design from (Song *et al.* 2013), (Chao *et al.* 2017) uses an OR of 29.8%, which in our opinion, the better OR for savonius is between 10% - 16% as shown by Bachtiar (2019) and (Chen *et al.* 2016).

Overlap on turbine blades affects the performance of the turbine. The test results prove that an overlap of 10% -16% produces the best performance (Bachtiar 2019), while inside (Hassanzadeh and Mohammadnejad 2019) has confirmed that 20% overlap makes the best performance; this is also the same as savonius with three blades (Morshed *et al.* 2019). Therefore in this article, the overlap is set at 15%.

Song *et al.* (2013) first introduced the fish-ridge turbine. According to Song, the ideal blade shape for a fish-ridge turbine is a chord length value of 18% of the initial design value, the radius of curvature is 4% of the initial design value, and the stagger angle is 23% of the original design (Song *et al.* 2013). In 2015, Song continued his research, comparing the fish-ridge performance with savonius in an open spaces environment (Song *et al.* 2015). The results showed the fish-ridge turbine had a higher power coefficient than the savonius. The fish-ridge turbine produced higher power and higher torque coefficient. It was 7% greater than the savonius at an airspeed of 10m/s. Several studies related to VAWT performance can be seen in Table 1.

The implementation of the fish-ridge type VAWT turbine in the OWC system provides novelty in energy diversification research. So far, studies on fish-ridge have only been carried out in open spaces (Chao *et al.* 2017), (Hassanzadeh and Mohammadnejad 2019),(Chao *et al.* 2017). In an OWC system, two different conditions occur alternately for rotating the turbine. They are-compressed-and decompressed conditions. The compressed condition is when the water level rises, thus creating high air pressure in the turbine chamber. The decompressed condition is when the water level drops, creating a state for decompressed in the air space. Both the compressed and decompressed conditions generate/cause high airflow, thus turning the turbine.

This article presents a detailed analysis based on works that have been carried out on the fish-ridge turbine as reported by Song (2013), Hiron *et al.* (2019), Chao *et al.* (2017), Hassanzadeh (Hassanzadeh and Mohammadnejad 2019), and Chao *et al.* (2017). The aerodynamic phenomenon of the airflow inside the OWC with a fish-ridge turbine is simulated using ANSYS to produces parameters of the generated wind power and the static torque to AoA of the turbine so that the fish-ridge work on the OWC system can be explained in more detail. The analysis is carried out on the upstream speed variations in the OWC chamber, namely 6m/s, 10m/s, and 14m/s. Static torque is carried out at one full rotation at angle of 0 degrees to 360 degrees. A CFD simulations uses Reynolds-Averaged Navier – Stokes (RANS) equations (Muneer *et al.* 2015), (Yang *et al.* 2021) to

Table 1 Previous research on three-blade and two-blade savonius

Blade number	Cp	TSR	OR	Author
3	31%	1.02	10%	(Bachtiar 2019)
3	23%	0.8	15%	(Chen <i>et al.</i> 2016)
3	22.8%	0.9	15%	(Yao <i>et al.</i> 2019)
3	30%	0.8	15%	(Sobczak <i>et al.</i> 2020)
2	21%	0.8	10%	(Hassanzadeh and Mohammadnejad 2019)
2	35%	0.8	16%	(Chen <i>et al.</i> 2016)
2	24.5%	0.45	15%	(Hiron <i>et al.</i> 2019)

obtain detailed data related to free-stream velocity and air pressure dynamics on the turbine surface. We compared the CFD results and the lab-scale prototype experiment data to validate the fish-ridge static torque analysis.

2. Research method

The static torque of the turbine uses two approaches. The first test is based on CFD. The second is based on the prototype measurements using a digital torque meter and anemometer with a data logger, as shown in Fig. 8. The program is ANSYS version 18.2. The equation on the relationship between turbine rpm and airspeeds at OWC is obtained through prototype measurements, as shown in Fig. 8. The CP value against TSR can be calculated using Eq. (5). The modification parameters of the fish-ridge turbine are suggested in Table 2.

The fish-ridge turbine performance analysis is conducted based on simulation in two conditions. They are in compressed and decompressed states. The position of the turbine blade in the direction of wind flow is divided into four angles, at 90 degrees, 60 degrees, 30 degrees, and 0 degrees. The simulation results show airspeeds contours and air pressure under compressed and decompressed conditions. The methods are as follows:

2.1 Fish-ridge turbine

The fish-ridge rotor model used in this research is modified from the savonius blade reported by Song *et al.* (2013). The fish-ridge turbine design is based on the curvature of the fish-ridge fish-ridge. The goal is to reduce aerodynamic drag on the turbine blades. In work reported by Song *et al.* (Song *et al.* 2015), they studied the fish-ridge with savonius in an open-air environment. It was found, at an airspeed of 10 m/s, the fish-ridge efficiency can be reached 24.22% and 18.52% for the savonius turbine (Chao *et al.* 2017).

The turbine fish-ridge design is shown in Fig.1. The property of the fish-ridge turbine consists of large radius arcs (R2). The value of R2 is determined using Eq. (3). The other parameters are the radius of small arcs (R1), turbine diameter (D), stagger angle of small-arcs (α), stagger angle of large-arcs (β), diameter axis (d), diameter overlap (S), and chord length (L). Based on Chao *et al.* (Chao *et al.* 2017), the curvature of fish-ridge blades in computational form is represented by Eq. (1), where constanta $\psi = 0.977$ and constanta $\xi = 0.8719$. The distance between the blades is 120 degrees, using Eq. (2), then the total angles of α_1 and α_2 must be 120 degrees. The overlap ratio

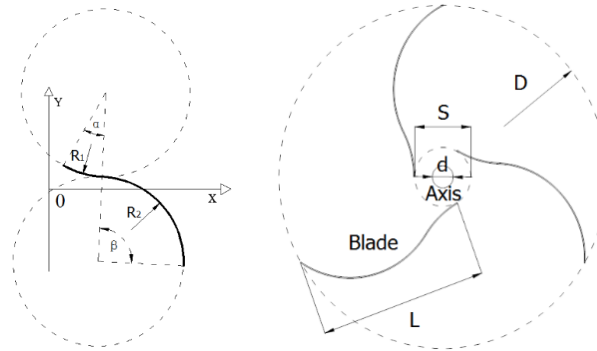


Fig. 1 Design of radius of curvature and small arc fish-ridge (Chao *et al.* 2017)

(OR) is determined using Eq. (4). From these provisions, it forms a fish-ridge turbine blade formation as shown in Fig. 1.

$$y(x, t) = (\psi x + \xi x^2) \sin(1.2516 + 1.4924) \tag{1}$$

$$\alpha_1 + \alpha_2 \approx 120^\circ \tag{2}$$

$$R = \frac{D}{2} \times \tan 30^\circ \tag{3}$$

$$OR = (S - d)/L \tag{4}$$

2.2 Oscillating water column mechanism

Fig. 2 shows the working system mechanism of an OWC that we proposed, and as an affirmation, we give a border as the scope of the study in this article. In simple terms, OWC converts ocean wave energy into kinetic energy based on the oscillations that occur in the chamber. Our observation area is the turbine working environment in the chamber, as shown in Fig. 2.

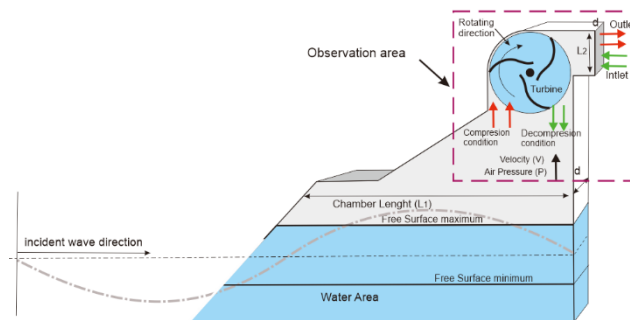


Fig. 2 The mechanism of the OWC with a fish-ridge turbine

An illustration of the implementation of OWC as part of a sea wave power plant using a wind turbine is shown in pada Fig. 3. We designed the OWC building to be placed long away on the coastal area, especially beaches threatened with abrasion by sea waves. The OWC design that we present has multi-functions, including a power generator; OWC can become seawall for coastal conservation solution.

Koefisien torque Static and coefficient Power of turbine

Turbine performance is generally determined from two main variables, namely CP and CT. CP stated that the turbine efficiency in extracting the energy received from the energy produced is in the form of mechanical energy (Kavade and Ghanegaonkar 2020). Therefore, The CP is expressed as Eq. (5), which is the ratio between the turbine power (PT) and the airspeeds. The airspeed power is the multiplication of the constant value=0.5. The air density (ρ) is in kg/m³, and the swept area of the turbine (A) is in m² and the airspeeds (V) in m/s. The value of PT can be obtained from the multiplication of the turbine torque (TT) in N.m against the turbine shaft rotation (ω T) in rad/s. PT can also be obtained through CFD simulations.

The turbine efficiency based on torque extraction is calculated using Eq. (7). The TS is the torque produced by the turbine in N.m, and R is the turbine radius in meters.

$$C_p = \frac{P_T}{0.5 \rho A V^3} \quad (5)$$

$$P_T = T_T \times \omega_T \text{ (watt)} \quad (6)$$

$$C_T = \frac{T_T}{0.5 \rho A R V^2} \quad (7)$$

$$C_T = \frac{T_T}{0.5 \rho A R V^2} \quad (8)$$

2.3 Turbine geometry

The fish-ridge turbine is designed with three blades, following a design (Chao *et al.* 2017). The fish-ridge blade formation is based on the parameters shown in Fig. 1, where the blade curve geometric shape is based on Eq. (1). We modify it at OR = 15%. Details and differences in turbine parameters are presented in Table 2.

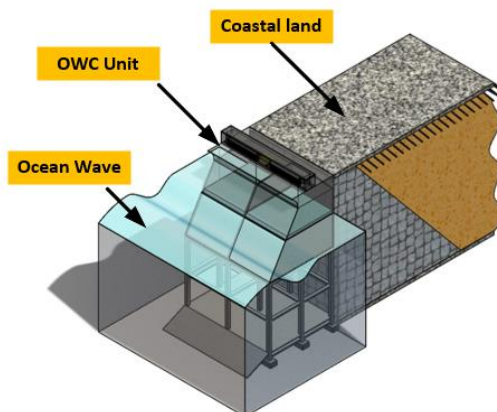


Fig. 3 The Illustration of OWC implementation as a low-wave power plant

Table 2 Turbine parameter comparison

Geometrical Parameters	Symbols	Dimension	
		Proposed	Song <i>et al.</i> *, Chao <i>et al</i>
Height turbine	H	200 mm	700 mm
Diameter turbine	D	100 mm	700 mm
radius of curvature	R	27.8 mm	192.5 mm
stagger angle	α	10.110	10.11°
chord length	L	55,2 mm	386 mm
small arc	Lm	17 mm	30 mm
Diameter axis	d	14.5 mm	45 mm
Diameter overlap	S	22.8 mm	160 mm
The angle of the large circular	α_1	850	910
Overlap ratio (OR)	α_2	350	270
	OR	15%	29.8%

* (Chao *et al.* 2017), (Song *et al.* 2013)

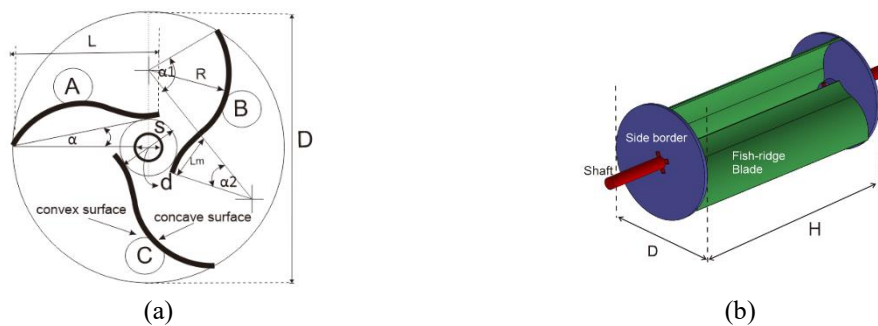


Fig. 4 The design of the fish-ridge turbine. (a). The side view of the fish-ridge turbine with overlap ratio (OR) and (b). Fish-ridge turbine 3D design

The turbine prototype and model used in CFD follow the basic design as shown in Fig. 4. To identify the AoA angle, we give the initials blade (A), blade (B), and blade (C) as shown in (Fig. 4(a)). Each blade has a 120 degrees angle to the other blade. Fish-ridge turbine 3D design with the initials D as the diameter (m) of the turbine and H as the turbine length in meter (Fig. 4(b)).

2.4 Domain meshing

The boundary domain of the fish-ridge turbine model consists of the rotating and stationary zones. The rotating zone is a vertical cylindrical shape with a position in the middle plane. The stationary zones are the part that supports the turbine, as shown in Fig. 5. The boundary domain consists of inlet and outlet velocities, as shown in Fig. 6. The inlet velocity is where the air flows into the turbine. The outlet is the place where air flows out of the turbine.

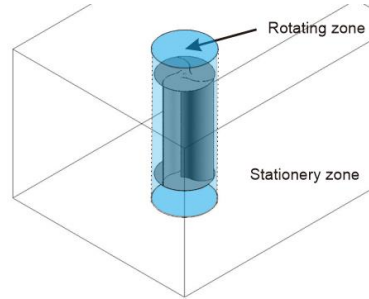


Fig. 5 Rotating and stationary zones in isometric view

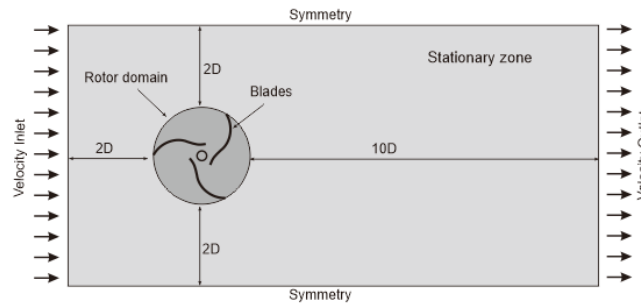


Fig. 6 Computational domain scheme

The meshing model uses a maximum size of 0.08 mm across all domains. A hexahedral meshing is chosen to obtain a high computational resolution in the computational process to form airspeeds and air pressure contours. In contrast, around turbine blades, a tetrahedral meshing type is used to solve the complex geometry around the surface of the turbine blades.

Torsion testing on the simulation experiment is carried out at airspeeds of up to 20 m/s. The prototype static torque measurement is measured using a torque meter model HNJ-1 equipped with a data logger. Turbine torque is measured at an AoA angle from 0 degrees to 360 degrees.

Analysis of airflow dynamics in a VAWT turbine is based on the linear potential theory described by Kang *et al.* (2018). The Reynolds-Averaged Navier – Stokes (RANS) equations (Langer and Swanson 2020). RANS involves continuity equations, momentum equations, and energy equations as governing equations form (Kang *et al.* 2018). The turbulent model is needed to solve the closure of the regulatory equation. However, the suitability of the turbulence model is still a matter of debate. The turbulence model of the Spalart-Allmaras equation was chosen to describe the complex flow of the turbine rotor (Rahman 2020). In general terms, the Navier – Stokes equation is expressed as follows

$$\rho \frac{\partial U_i}{\partial t} + \rho U_j \frac{\partial (U_i U_j)}{\partial x_j} = -\frac{\partial p}{\partial x_i} + \frac{\partial}{\partial x_j} \left(\frac{\partial U_i}{\partial x_j} + \frac{\partial U_j}{\partial x_i} \right) \quad (9)$$

$$\rho \frac{\partial U_i}{\partial t} + \rho U_j \frac{\partial U_i}{\partial x_j} = -\frac{\partial p}{\partial x_i} + \frac{\partial}{\partial x_j} \left(\left(\frac{\partial U_i}{\partial x_j} + \frac{\partial U_j}{\partial x_i} \right) - \rho \overline{\mu'_j \mu'_i} \right) \quad (10)$$

3. Results and discussions

3.1 Static torque with CFD

The CFD simulation was applied to obtain the static turbine torque. The numerical approach was used based on Navier – Stokes, as Eqs. (9) and (10) as presented in Table 3. In the simulation model, the turbine blades are given the initial A, B, C to indicate the position of the blades concerning AoA. Observations were made on blade C because blade C is the blade positioned behind the wind direction, so blade C is the blade that gets the minor drag power from the wind.

Table 3 shows the distribution of airflow in fish-ridge turbines based on variations in the AoA angle. Using CFD simulation, the air distribution in the turbine shows different airflow dynamics based on variations in the AoA angle. The observation area is an image with a red circle. The simulation is displayed in the form of zoom-out for the simulation area, and zoom-in only shows the observation area.


The simulation results of observations from Table 3 can be described as follow:

1. AoA = 0 degrees, the wind flow appears to hit the concave plane of blade B. Large circular and small circular play a role in distributing the thrust of downstream wind flow in a laminar form from blades B and A to the concave plane of blade C. then, downstream flow forms a vortex flow on blade C. This downstream flow then provides thrust support on blade C to contribute to an even distribution of airspeed in each blade.
2. At AoA = 20 degrees, it appears that there is a continuous flow of air on blade C so that at an angle of AoA=20 degrees, it can be concluded that there is no significant aerodynamic resistance. No 3 shows the continuation of the wind flow that occurs in No 2. At AoA = 40 degrees, it appears that there is an increase in airflow in the C blade due to OR, so that at the angle AoA = 40, it can be concluded that there is no significant aerodynamic resistance.
3. At AoA = 40 degrees, the airspeeds flowing in the OR become more solid than in No 1, 2, 3.
4. AoA=60 degrees is the angle where the OR inlet space faces the wind accident, which then causes the wind flow to accelerate on the C blade. This condition proves that the curvature of the fish-ridge blades allows the wind flow to be more easily distributed than conventional savonius turbines.
5. AoA=80 degrees, the high airspeeds in the OR area causes blade C to get high thrust, even though blade B still occurs slowly due to aerodynamic drag from blade A, but blade C provides considerable power compensation.
6. AoA=100 degrees. There is low airspeed distribution between blade B and blade C. Even though there is high flow in the OR area. The aerodynamic resistance on blades B and C is lacking.

From the description of Table 3, it can be concluded that OR=15 contributes to the thrust of the blade, which indirectly gets the thrust from the incoming wind. These results prove the facts from a study conducted by (Shamsoddin and Porté-Agel 2020).

We present the static torque test results on the turbine rotor rotation at airspeeds of 5m/s. However, we have managed to collect static torque data against AoA at several turbine rpm, which varies from 7.5 rpm to 120 rpm, as shown in Fig. 7. This analysis can conclude that the more rotation of the turbine, the smaller the torque produced. The turbine rotor rotation at low speed (15 rpm) has the highest torque of 0.00686 N.m. the average torque obtained by the maximum value is 0.044 occurs at AoA 10 degrees, 120 degrees, 250 degrees.

Table 3 The contour of air distribution in fish-ridge turbine

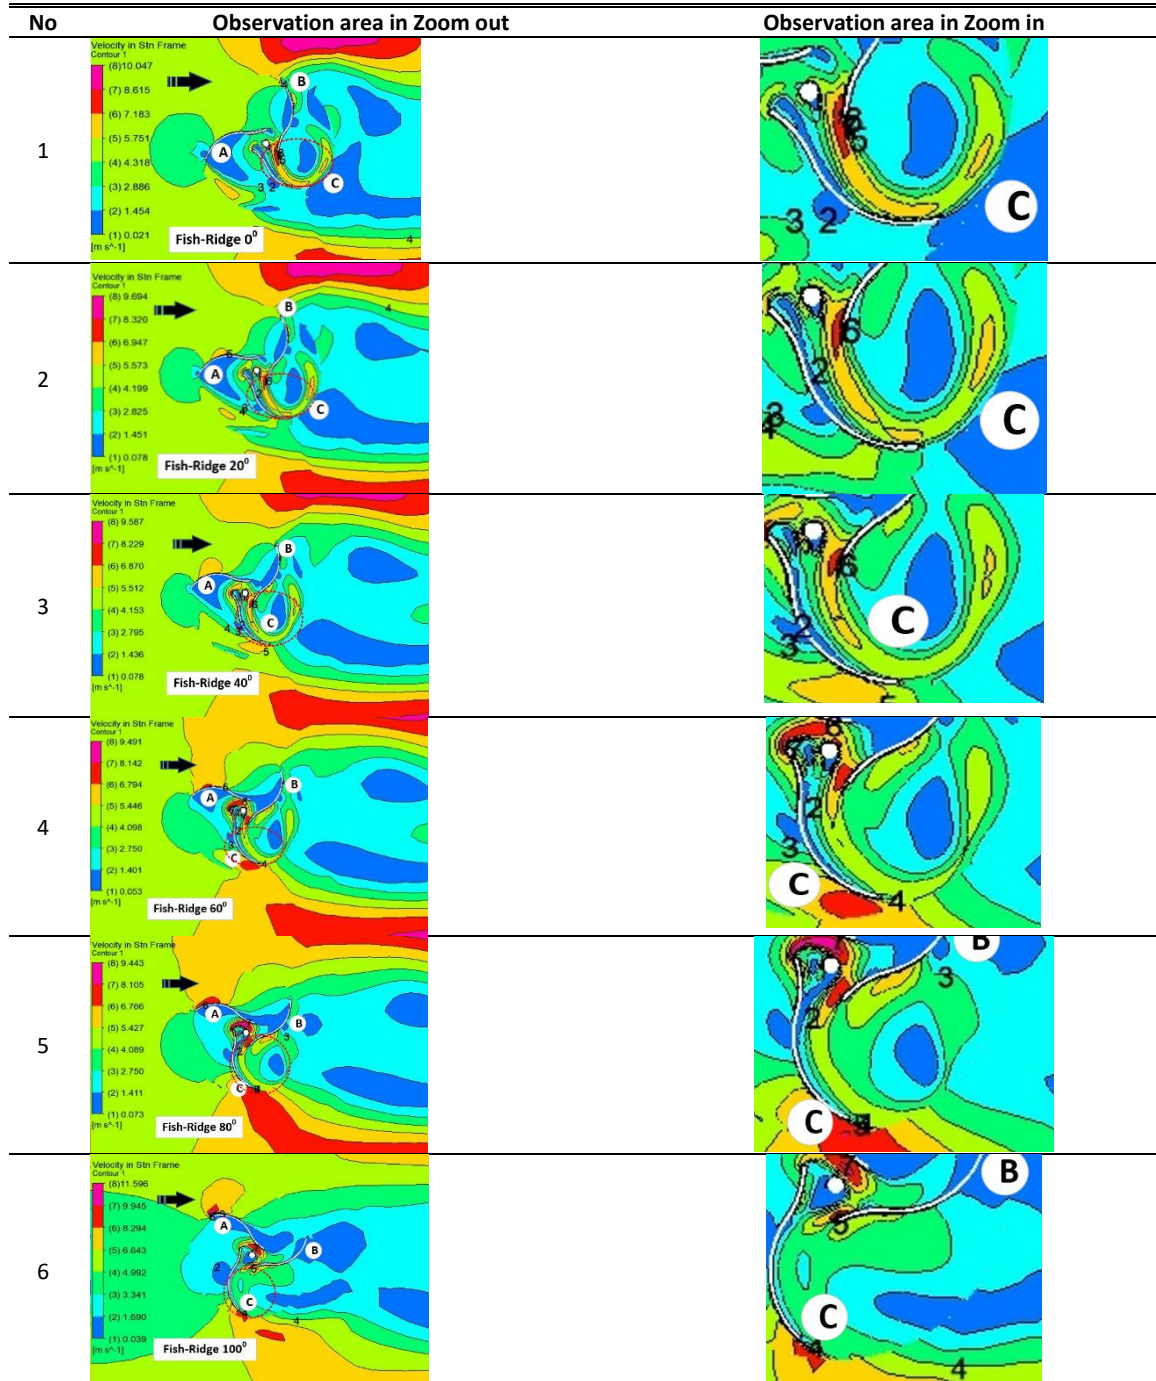

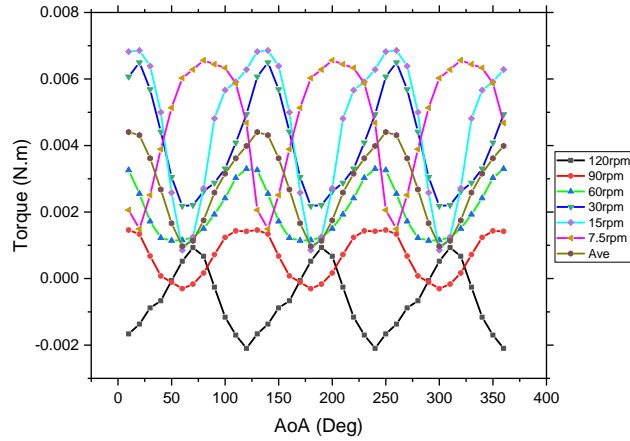


Fig. 7 Static torque vs. AoA at various rpm

Table 4 Peak torque at various turbine rotation

Rotation (RPM)	AoA (Degrees)		
7.5	80	200	320
120	70	190	310
15	20	140	260
30	20	140	260
90	10	130	250
60	120	240	360

Fig. 7 also shows that fish-ridge turbines at high rpm appear to reduce torque, creating negative torque. The torque reduction is because, at high speeds with low airspeeds, fish-ridge turbines experience decreased performance. This condition is a weakness of the commonly encountered VAWT turbines. by previous researchers.

Static torque testing of variations in turbine rotor rotation is concluded in Table 4, and the AoA= 10 degrees to 20 degrees occurs a rotation at 15 rpm, 30 rpm, and 90 rpm. The AoA=70 degrees to 80 degrees occurs at rotation 7.5 and 120 rpm. The AoA=120 degrees occurs at a rotation of 60 rpm.

3.2 Static torque with prototype experiment

We were also testing the prototype turbine on the experimental as in Fig. 8. The airspeeds towards the turbine are set at 5 m/s. The results of the mean torque measurement of five repetitions are shown in Fig. 9. Then it is compared with the simulation results at the mean torque of Fig. 7.

Comparison of static torque observations based on the simulation against the prototype measurement as in Fig. 9 shows that the two tests show that the maximum torque occurs at AoA 80

degrees, 200 degrees, and 320 degrees. The result is that our prototype produces 0.007 Nm of torque while the simulation, the turbine, produces 0.078 Nm.

From the static torque test, it can be concluded that the fish-ridge turbine has a high response at low airspeeds; therefore, the fish-ridge turbine is very suitable for use in low-wave OWC systems.

Using the mean torque value from Fig. 7, then numerically through the curve fitting as in Eq. (11), shows the relationship between the airspeeds and the torque generated by the fish-ridge turbine Fig. 10. T_R is the turbine rotor torque (N.m), W_S is the airspeeds (m/s).

$$T_R = -0.0005 (W_S) + 0.0054 \tag{11}$$

The relationship of TSR to fish-ridge turbine torque can be calculated numerically using Eq. (12), where T_R is the turbine rotor torque (N.m), constanta, and constanta. TSR is obtained using Eq. (8). The graph of the TSR relationship to turbine torque is shown in Fig. 11.

$$T_R = \Pi(TSR^2) + \Psi (TSR) + 0.00543 \tag{12}$$

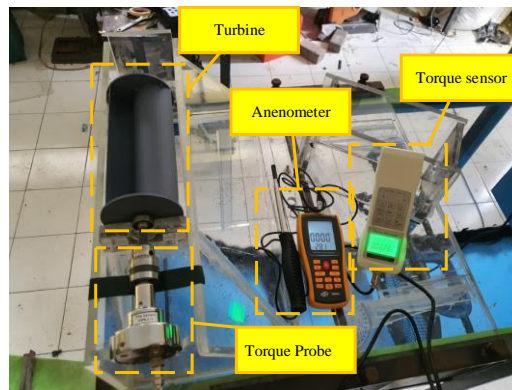


Fig. 8 The turbine static torque measurement on the OWC prototype

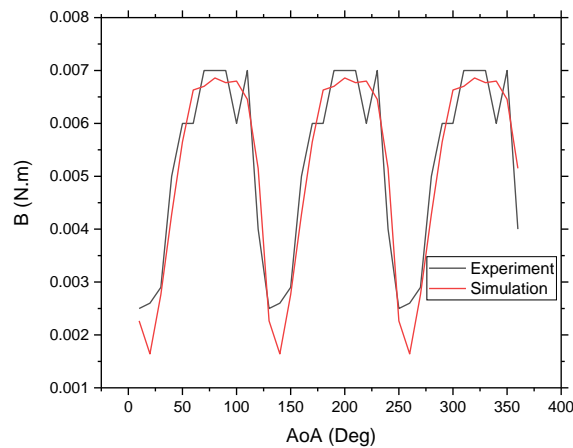


Fig. 9 Rotor torque vs. AoA

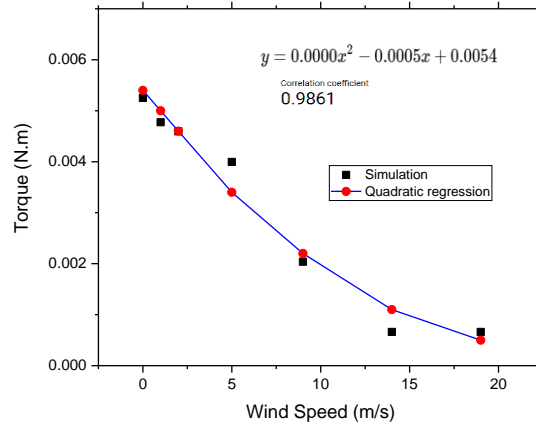


Fig. 10 Turbine torque vs. airspeeds

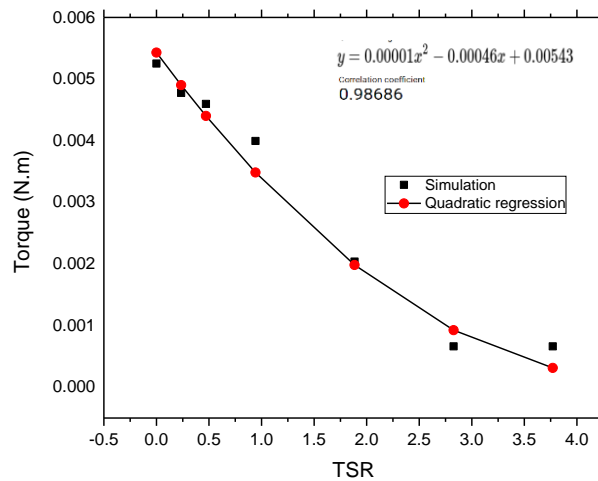


Fig. 11 Rotor torque vs. wind velocity

Fig. 12 shows a graph of the correlation between the turbine speed (m/s) and airspeeds (m/s). A linear equation is obtained based on the prototype measurement data sampling as shown in Eq. (13), where W_s is wind speed (m/s), $\Theta = -345.603619236845$, $\Lambda = 396.2937800495123$, and $\Omega = 170.99764196071726$. R_T is the turbine rotor rotation (rpm), WS is the airspeeds in the OWC system (m/s). From Fig. 12, it appears that the fish-ridge turbine produces high turbine rotation at low airspeeds. This condition is due to the turbine's lightweight and the increased air pressure in the chamber OWC. In actual conditions, the turbine rotation speed is influenced by the turbine forming material.

$$R_T = \Theta + \Lambda (W_s) + \Omega (W_s^2) \quad (13)$$

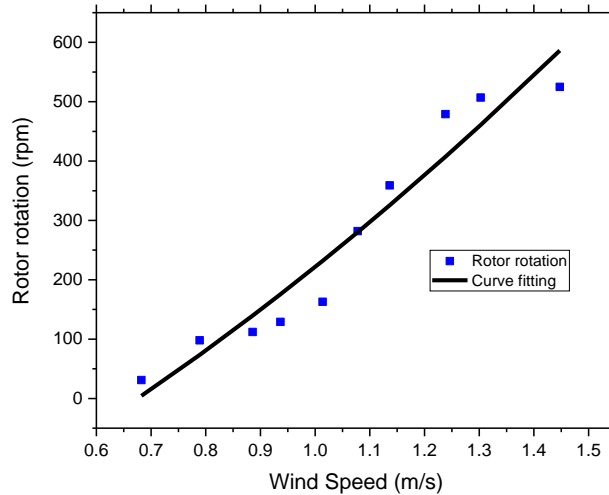


Fig. 12 Rotor rotation vs. airspeeds

3.3 Aerodinamik fish-ridge in OWC

Like the OWC chamber in actual conditions (Fig. 2), the water level inside the OWC chamber is determined by the water surface behavior outside the chamber. The chamber water surface has three different states; they are steady, high, and low. The steady-state is where there are no waves outside the chamber. The low-state is where the increased air pressure comes from inside the chamber area and then flows to the turbine then goes to the air outlet, called a compressed condition. The low-state is where the wave peak is at the negative peak so that high air pressure comes from the outlet to the turbine and is stuck in the chamber, which is called a decompressed condition. This condition is continuous during wave oscillation outside the chamber, while the turbine rotation continues in one direction under compressed conditions and calm conditions.

A CFD simulation of a fish-ridge turbine performance that depicts airspeeds and air pressure contours in the OWC system under compressed conditions is described in Fig. 19. In contrast, the decompressed state is represented in Figs. 15 and 16.

Fig. 13 shows a contour of airspeeds on a fish-ridge turbine under compressed conditions. At $\Theta=90$ degrees, it appears that the airspeeds from the chamber have a slow rate. It was 0.127 m/s on the surface of the concave area of the A2 blade. The airspeeds in laminar form occur in the overlap area and towards the concave blade area of sections A1 and A3. This laminar form due to the significant pressure in the A2 concave area of the blades.

At $\Theta=60$ degrees, turbulence begins to form in the A2 and A3 blades concave plane, increasing the wind flow rate in A2. When $\Theta=30$ degrees, the turbulence-shaped flow becomes very significant with a speed of 1.1 m/s in the concave area of blade A1. The greater the turbulence flow at $\Theta=0$ degrees. The overlap area with OR = 15% allows airflow in the laminar form to support the non-thrust blades have more thrust. This cycle occurs for each blade; therefore, this cycle is repeated for each of the blades.

Fig. 14 shows a contour of compressed air pressure on a fish-ridge turbine in an OWC system. At $\Theta=90$ degrees, the immense pressure is 0.368Pa on the concave surface of A2 blades, while at

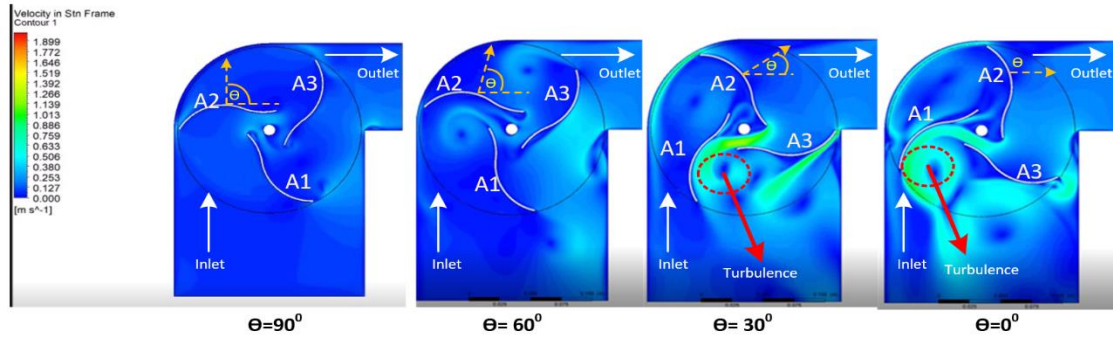


Fig. 13 Airspeeds on turbine blades under compressed conditions

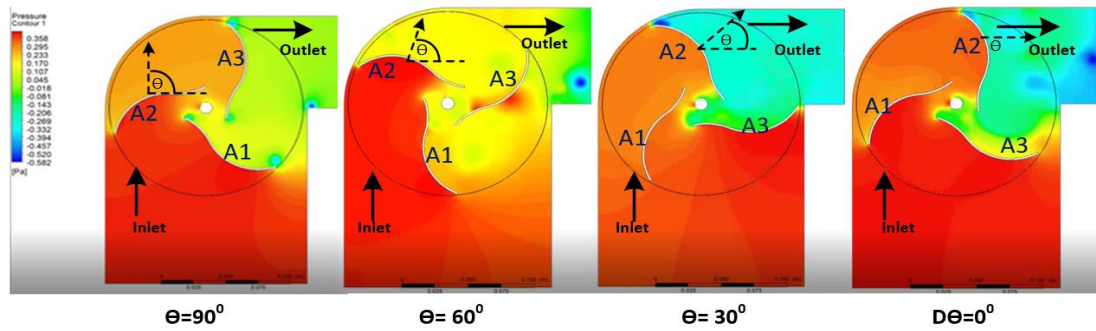


Fig. 14 Air pressure on the turbine in the chamber under compressed conditions

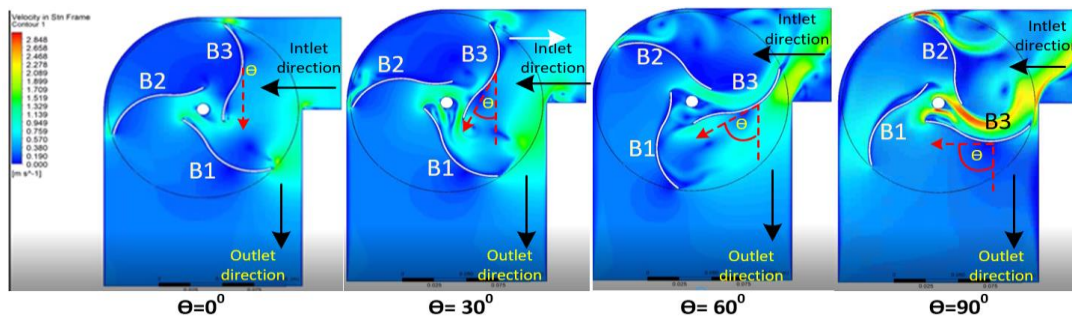


Fig. 15 The contour of airspeeds distribution at decompressed conditions

low pressure, 0.045 Pa occurs on convex A3. At $\theta=60$ degrees, low pressure occurs on the concave and convex A3 parts of 0.107Pa at $\theta=30$ degrees, low pressure occurs at convex A2 and continues at $\theta=0$ degrees. This cycle occurs for each blade of the fish-ridge turbine.

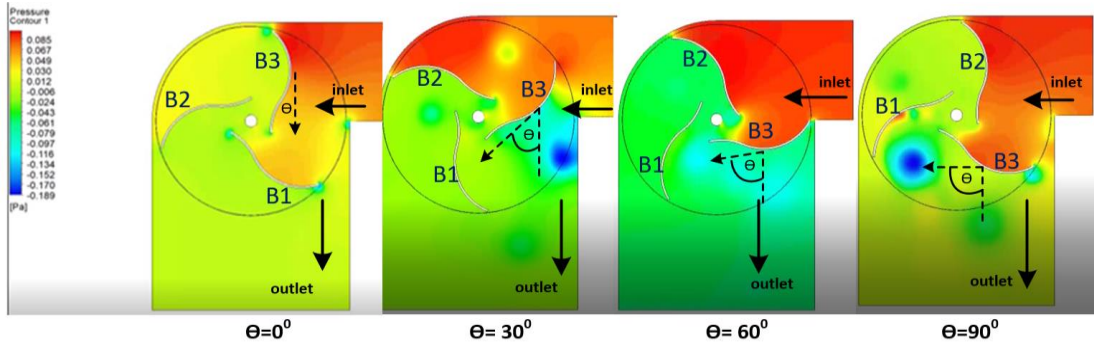


Fig. 16 The contour of air pressure distribution at decompressed conditions

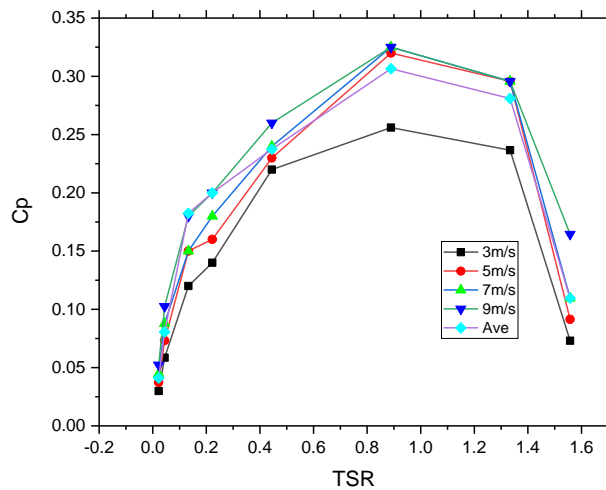


Fig. 17 Power coefficient vs. TSR at the compressed condition

From Figs. 13 and 14, it can be concluded that, in the distribution of wind flow, the fish-ridge turbine with OR=15% of the wind flow is continuously distributed. The fish-ridge turbine also proved that the aerodynamic drag of the turbine did not occur significantly. The shape of the OWC, which tends not to have free air space, makes air pressure isolated on one blade only, while the other blades experience low air pressure. In the compressed conditions based on Figs. 14 and 15, with varying airspeeds 3 m/s, 5 m/s, 7 m/s, 9 m/s in the fish-ridge turbine model in the compressed condition, we can draw a relationship of power coefficient (C_p) to TSR under compressed conditions as shown in Fig. 17.

The airspeed variation applied to the model appears that the maximum turbine efficiency reaches 30% at TSR=0.9, as shown in Fig. 17. These results prove that the implementation of the fish-ridge turbine in the OWC system produces better efficiency than applied to open spaces as has been done in (Song *et al.* 2013). Compared to the savonius study (Hassanzadeh and Mohammadnejad 2019),

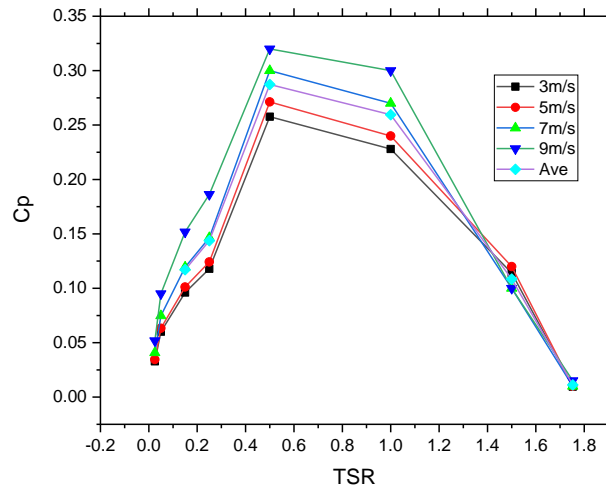


Fig. 18 Power coefficient vs. TSR at the decompressed condition

the fish-ridge turbine produces higher efficiency. In the OWC system, there is high air pressure due to the oscillation of the water surface in the chamber.

From Fig. 17, it appears that high compressed condition causes the turbine to extract energy in the TSR range between 0.8 to 1.2, meaning that the fish-ridge turbine experiences optimum efficiency at low waves (TSR=0.8) to high waves (TSR=1.2). This fact proves that the application of a fish-ridge turbine can work optimally at low to high waves.

Fig. 15 shows a contour of airspeeds on a fish-ridge turbine under decompressed conditions. The wind flow from the inlet to the turbine is not the same during the compressed conditions, so the wind flow contour analysis starts from $\Theta=0$ degrees and ends at $\Theta=90$ degrees.

When $\Theta=0$ degrees, the high-speed wind flows on concave B1 and partially flows to the B2 blade through the overlap area in the form of laminar flow. At $\Theta=30$ degrees, the wind flow increases on the blades of concave B1 and concave B2. At $\Theta=60$ degrees, the laminar flow with a speed of 1,899 m/s is evenly distributed over the concave section of blade B3. A turbulent stream begins to appear at the convex end of the B2 blade. At $\Theta=90$ degrees, the flow of laminar shape with a velocity of 2,848 m/s flows on concave B3, and the turbulence flow increases in the convex area of blade B2.

Fig. 16 shows a contour of decompressed air pressure in a fish-ridge turbine in an OWC system. Analysis of air pressure under decompressed conditions starts from $\Theta=0$ degrees and ends at $\Theta=90$ degrees. At $\Theta=0$ degrees, high air pressure occurs in the concave area B1, while B2 and B3 experience low air pressure. At $\Theta=30$ degrees, the air pressure in the concave area of B1 drops significantly, while the air pressure in the concave area of B3 becomes high. At $\Theta=60$ degrees, the maximum air pressure occurs in the concave area of B3, up to $\Theta=90$ degrees. This procedure is one duty cycle for each turbine.

Figs. 15 and 16 decompressed conditions with varying airspeeds, namely 3 m/s, 5 m/s, 7 m/s, and 9 m/s in the fish-ridge turbine model OWC decompressed system that the maximum efficiency of the turbine reaches 28% at TSR=0.6 (Fig. 18). this value is lower than in the compressed condition. However, at TSR=1.0, the turbine efficiency still came 26%, then plunged at TSR > 1.0.

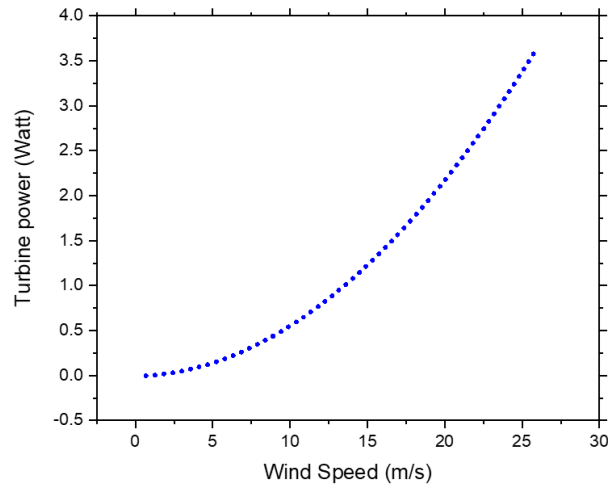


Fig. 19 Power turbine vs. airspeeds

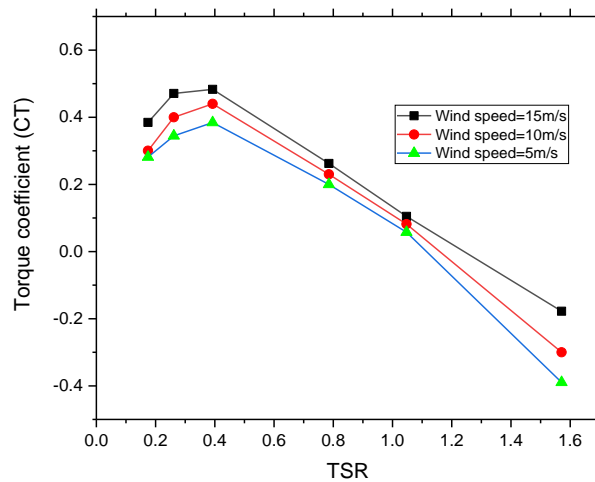


Fig. 20 Torque vs. TSR

Compared to turbine efficiency under compressed conditions (Fig. 17), turbine efficiency under decompressed conditions (Fig. 18) is more sensitive at low airspeeds. Still, the TSR range and efficiency levels are minor than under compressed conditions.

From the above observations, it can be concluded that the aerodynamic behavior in compressed conditions involves maximum airspeeds of 1.90 m/s and air pressure of 0.36 Pa in the system. In comparison, in a decompressed condition, the maximum airspeed was 2.86 m/s with a maximum air pressure reaching 0.085 Pa., meaning that the turbine rotates more slowly but with enormous torque during the compressed condition. In contrast, when in the decompressed condition, the turbine rotates faster but with lower torque than under compressed conditions. The fish-ridge turbine in the OWC system absorbs wind energy into kinetic energy at faster rotation at low airspeeds. This condition is proof that fish-ridge has little aerodynamic resistance.

Using the simulation results from Table 3 by collecting the CFD data, the relationship between the airspeeds in the chamber and the power generated by the turbine is obtained, as shown Fig. 19. It appears that there is a fish-ridge turbine power which increases with increasing airspeeds on the turbine. Numerically, the relationship between the airspeeds and the turbine power generated is expressed in Eq. (14), where P_T is the turbine power (watts), W_s is the wind speed or airspeeds in the OWC (m/s), $\Pi = -0.005112414150319368$, $\Gamma = 0.0027620508076888735$, $\Upsilon = 0.005307706457862304$. The torque coefficient of the turbine with variations in airspeeds shows in Fig. 20. The test results obtained a linear relationship with the airspeeds around the turbine, as in Fig. 20. It appears that in the variation of airspeeds in the OWC system, the peak torque coefficient of the fish-ridge turbine occurs at $TSR = 0.3$, then drops significantly at $TSR > 0.4$. We agree that the fish-ridge turbine in the OWC system is very easy to rotate at low speeds.

$$P_T = \Pi + \Gamma(W_s) + \Upsilon(W_s^2) \quad (14)$$

4. Conclusions

This article presents a fish-ridge turbine's performance results on an OWC system from an aerodynamic perspective regarding airspeeds and pressure for energy extraction. Our proposed design shows low-wind resistance. Fish-ridge turbine behavior in an OWC system at decompressed conditions is more sensitive than at compressed conditions. An Overlap ratio $OR=15\%$ causes a laminar flow from the turbine blades that do not directly thrust from the accident wind. The distribution of wind flow is evenly distributed on all turbine blades. In the compressed condition, the maximum efficiency of the fish-ridge turbine was 30% achieved at $TSR 0.9$.

In contrast, in the decompressed-condition, the maximum efficiency of the turbine was 28%. And it was achieved at $TSR 0.6$. We also found that the fish-ridge turbine is more sensitive to achieve maximum performance in the decompressed condition. The maximum torque coefficient of the turbine was 55% at $TSR 0.3$

Acknowledgments

This article is part of doctoral research in engineering at the University of Udayana Bali, Indonesia. This research was supported by support from Udayana University (UNUD) and Silwangi University (UNSIL).

References

- Agbormbai, J. and Zhu, W. (2020), "Experimental study of the performance of a novel vertical-axis wind turbine", *Appl. Sci.*, **10**(8). <https://doi.org/10.3390/APP10082902>.
- Bachtiar, I. K. (2019), "The Effect of Blade Overlap on The Performance of Savonius Wind Turbine", *Proceedings of the 2019 IEEE Conference on Energy Conversion (CENCON)*. IEEE, 236-239. doi: <https://doi.org/10.1109/CENCON47160.2019.8974807>.
- Chao, M.A., Song, L. and Hang, M.Z. (2017), "Performance Study for A Novel Vertical Axis Wind Turbine based on Simulation Analysis", *Proceedings of the Networking, Sensing and Control (ICNSC), 2017 IEEE 14th International Conference on*. Calabria, Italy.


- Chen, L., *et al.* (2016), “Wind tunnel investigation on the two- and three-blade Savonius rotor with central shaft at different gap ratio”, *J. Renew. Sust. Energ.*, **8**(1). <https://doi.org/10.1063/1.4940434>.
- Hassanzadeh, R. and Mohammadnejad, M. (2019), “Effects of inward and outward overlap ratios on the two-blade Savonius type of vertical axis wind turbine performance”, *Int. J.Green Energy*, **16**(15), 1485-1496. <https://doi.org/10.1080/15435075.2019.1671420>.
- Hiron, N., *et al.* (2019), “The Performance of a Three-blades Fish-ridge Turbine in an Oscillating Water Column System for Low Waves”, *Proceedings of the 2019 International Conference on Sustainable Engineering and Creative Computing (ICSECC)*. IEEE.
- Hiron, N., Andang, A. and Busaeri, N. (2019), “Investigation of Wireless Communication from Under Seawater to Open Air with Xbee Pro S2B Based on IEEE 802.15.4 (Case Study: West Java Pangandaran Offshore Indonesia)”, *Adv. Intel. Syst. Comput.*, 672-681. https://doi.org/10.1007/978-3-030-02683-7_47.
- Kang, C., *et al.* (2018), “Upstream flow control for the savonius rotor under various operation conditions”, *Energies*, **11**(6), 1-20. <https://doi.org/10.3390/en11061482>.
- Kavade, R.K. and Ghanegaonkar, P.M. (2020), “Effect of blade pitching on power coefficient of small-scale vertical axis wind turbine at different tip speed ratios”, *Wind Eng.*, **44**(3), 313-324. <https://doi.org/10.1177/0309524X19849841>.
- Langer, S. and Swanson, R.C. (2020), “On Boundary-Value Problems for RANS Equations and Two-Equation Turbulence Models”, *J. Sci. Comput.*, **85**(1), 1-33. <https://doi.org/10.1007/s10915-020-01323-9>.
- Lipian, M., Czapski, P. and Obidowski, D. (2020), “Fluid-structure interaction numerical analysis of a small, urban wind turbine blade”, *Energies*, **13**(7), 1-15. <https://doi.org/10.3390/en13071832>.
- Matoug, C., *et al.* (2020), “An hybrid approach for the comparison of VAWT and HAWT performances for floating offshore wind turbines”, *J. Phys. Conference Series*, **1618**(3). <https://doi.org/10.1088/1742-6596/1618/3/032026>.
- Morshed, K.N., *et al.* (2019), “Wind tunnel testing and numerical simulation on aerodynamic performance of a three-bladed Savonius wind turbine”, *J. Appl. Fluid Mech.*, **12**(3), 819-829. <https://doi.org/10.29252/jafm.12.03.29324>.
- Muneer, A., *et al.* (2015), “CFD analysis of a Savonius Vertical Axis Wind Turbine”, *Energies*, **8**(4), 3013-3033. <https://doi.org/10.3390/en8043013>.
- Rahman, M.M. (2020) “Introducing consistently formulated eddy-viscosity coefficient with spalart–allmaras model”, *AIAA J.*, **58**(6), 2764-2769. <https://doi.org/10.2514/1.J059118>.
- Shamsoddin, S. and Porté-Agel, F. (2020), “Effect of aspect ratio on vertical-axis wind turbine wakes”, *J. Fluid Mech.*, **889**, 11-112. <https://doi.org/10.1017/jfm.2020.93>.
- Sobczak, K., *et al.* (2020), “Numerical investigations of the savonius turbine with deformable blades”, *Energies*, **13**(14). <https://doi.org/10.3390/en13143717>.
- Song, L., Liu, H. and Yang, Z. (2016), “Orthogonal Analysis Based Performance Optimization for Vertical Axis Wind Turbine”, *Math. Probl. Eng.*, 334-339. <http://dx.doi.org/10.1155/2016/6241360>, Research.
- Song, L., Liu, H.Z. and Yang, Z.X. (2015), “Performance comparison for savonius type wind turbines by numerical analysis approaches”, *Proceedings of the International Conference on Advanced Mechatronic Systems, ICAMechS*, 2015-October.
- Song, L.S., Ang, Z.Y. and Eng, R.D. (2013) “Performance and Structure Optimization for a New Type of Vertical Axis Wind Turbine”, *Proceedings of the 2013 International Conference on Advanced Mechatronic Systems*. IEEE.
- Yang, Z., *et al.* (2021), “Reynolds-Averaged Navier-Stokes Equations Describing Turbulent Flow and Heat Transfer Behavior for Supercritical Fluid”, *J. Therm. Sci.*, **30**(1), 191-200. <https://doi.org/10.1007/s11630-020-1339-6>.
- Yao, J., *et al.* (2019), “Parameter analysis of savonius hydraulic turbine considering the effect of reducing flow velocity”, *Energies*, **13**(1). <https://doi.org/10.3390/en13010024>.



Ads by Google

Stop seeing this ad Why this ad? ⓘ

Ocean Systems Engineering

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
<p>South Korea</p>  <p>Universities and research institutions in South Korea</p>	<p>Engineering</p> <ul style="list-style-type: none"> Automotive Engineering Mechanical Engineering Mechanics of Materials Ocean Engineering <p>Environmental Science</p> <ul style="list-style-type: none"> Water Science and Technology <p>Mathematics</p> <ul style="list-style-type: none"> Modeling and Simulation 	Techno Press	8

PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	20936702, 2093677X	2017-2021	<p>Homepage</p> <p>How to publish in this journal</p> <p>m-kim3@tamu.edu</p>

SCOPE

The OCEAN SYSTEMS ENGINEERING focuses on the new research and development efforts to advance the understanding of sciences and technologies in ocean systems engineering. The main subject of the journal is the multi-disciplinary engineering of ocean systems. Areas covered by the journal include; * Undersea technologies: AUVs, submersible robot, manned/unmanned submersibles, remotely operated underwater vehicle, sensors, instrumentation, measurement, and ocean observing systems; * Ocean systems technologies: ocean structures and structural systems. design and production.





ocean engineering systems; * Ocean systems technologies; ocean structure and structural systems; design and production; ocean process and plant, fatigue, fracture, reliability and risk analysis, dynamics of ocean structure system, probabilistic dynamics analysis, fluid-structure interaction, ship motion and mooring system, and port engineering; * Ocean hydrodynamics and ocean renewable energy, wave mechanics, buoyancy and stability, sloshing, slamming, and seakeeping; * Multi-physics based engineering analysis, design and testing: underwater explosions and their effects on ocean vehicle systems, equipments, and surface ships, survivability and vulnerability, shock, impact and vibration; * Modeling and simulations; * Underwater acoustics technologies.





Join the conversation about this journal

Quartiles

FIND SIMILAR JOURNALS ?

<p>1 International Journal of Offshore and Polar USA</p> <p>69% similarity</p>	<p>2 Marine Systems and Ocean Technology CHE</p> <p>65% similarity</p>	<p>3 Journal of Marine Science and Application CHN</p> <p>64% similarity</p>	<p>4 Journal of Ocean Mechanics & Engineering USA</p> <p>63% similarity</p>
--	--	--	---

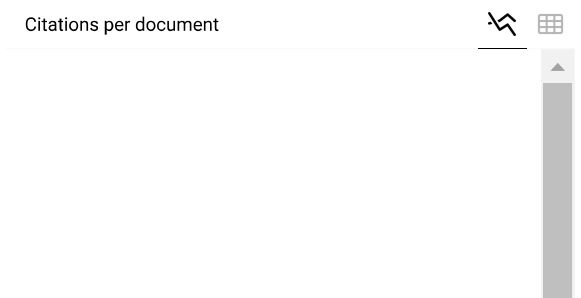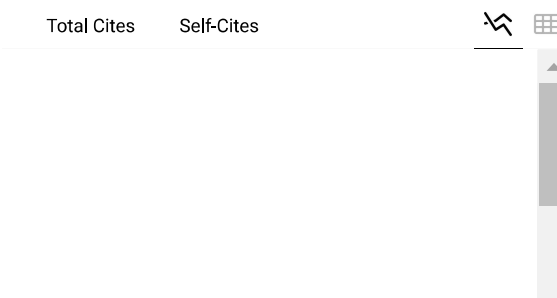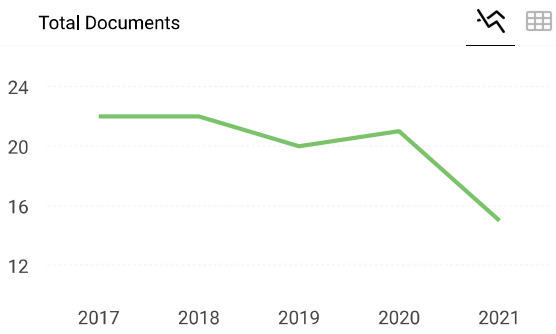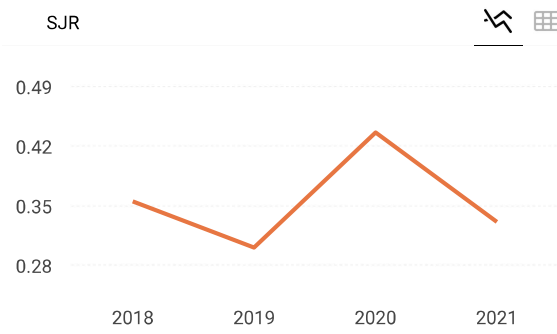

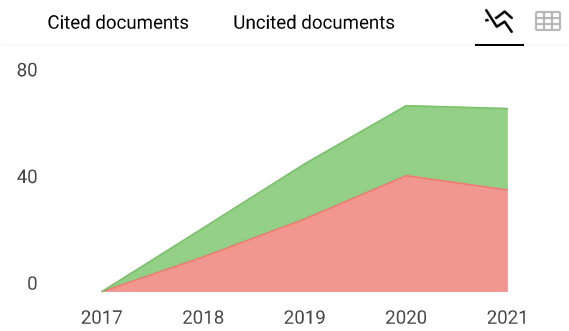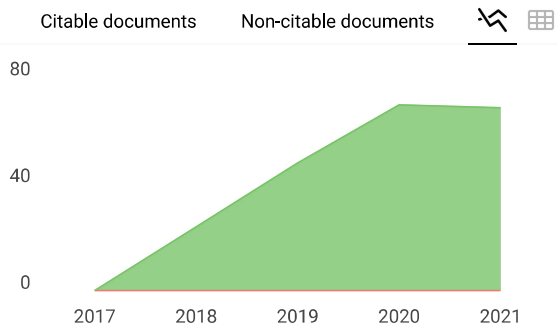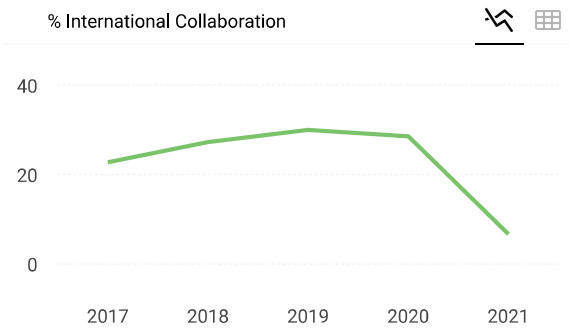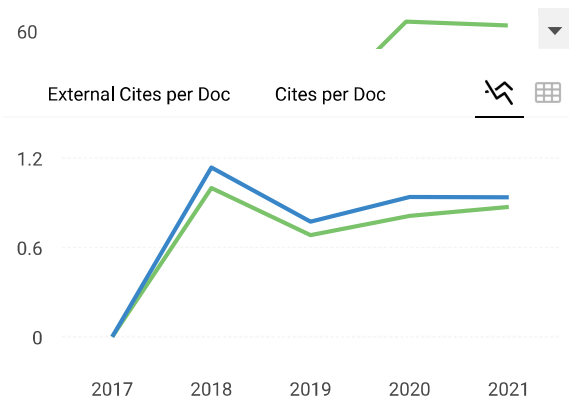

Ocean Systems Engineering

Automotive Engineering

Q2 best quartile

SJR 2021 0.33

powered by scimagojr.com

← Show this widget in your own website


Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" style="border: 1px solid #ccc; padding: 2px; display: inline-block;">https://www.scimagojr.com
```

SCImago Graphica

Explore, visually communicate and make sense of data with our **new free tool**.

Get it

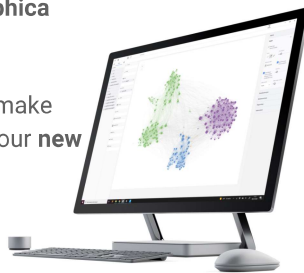

Metrics based on Scopus® data as of April 2022

V **Vishwanatha Mane** 2 years ago

I did not receive a confirmation mail after uploading.

reply



Melanie Ortiz 2 years ago

Dear Vishwanatha,
thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to contact the journal's editorial staff , so they could inform you more deeply. Best Regards, SCImago Team

V **Vishwanatha Mane** 2 years ago

Respected sir, I am feeling difficulty in uploading my research paper. Can you suggest any alternative way of uploading it to your journal

reply



Melanie Ortiz 2 years ago

Dear Vishwanatha,
thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to contact the journal's editorial staff , so they could inform you more deeply. Best Regards, SCImago Team

Leave a comment

Name

Email

(will not be published)



I'm not a robot

reCAPTCHA
Privacy - Terms


Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on [@ScimagoJR](#)

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1,1,106)



Hiron Hiron <hiron@unsil.ac.id>

[Techno-Press] Soft copy of your paper

1 message

OSE <ose@techno-press.com>
To: hiron@unsil.ac.id

Wed, Jun 23, 2021 at 1:10 PM

Dear Prof. Hiron:

Attached please find the soft copy of your article published in "Ocean Systems Engineering, Vol. 11, No.2". You may purchase the print copy of this issue at the special price for authors (\$30 for 1 copy, \$50 for 2 copies, plus shipping charge). Please use the attached purchase order form to order your personal copies.

Lastly, we kindly ask you to recommend your journal (or any other Techno-Press Journals) to your library, which is the best way to promote the journal where your current work will appear. If institutional subscription is materialized, we would be happy to reward you with 1-year free personal online access to any Techno-Press journal of your choice.

Congratulations on publication of your paper and we look forward to more publication of your future works with us!

Best Regards,

Chang-Koon Choi
Editor-in-chief

CKC/hjl

2 attachments**Purchase Order Form (Techno-Press).docx**

38K

**ose1102003.pdf**

2702K