


LAMPIRAN

Lampiran 1. Data Sheet Panel Surya

ENGINEERING DRAWING (mm)

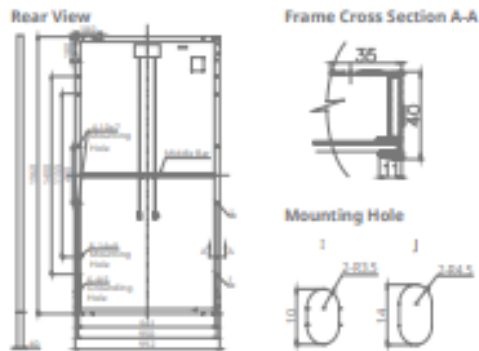

ELECTRICAL DATA / STC*

CS6U	330M	335M	340M	345M
Nominal Max. Power (P _{max})	330 W	335 W	340 W	345 W
Opt. Operating Voltage (V _{mp})	37.5 V	37.8 V	37.9 V	38.1 V
Opt. Operating Current (I _{mp})	8.80 A	8.87 A	8.97 A	9.06 A
Open Circuit Voltage (V _{oc})	45.9 V	46.1 V	46.2 V	46.4 V
Short Circuit Current (I _{sc})	9.31 A	9.41 A	9.48 A	9.56 A
Module Efficiency	16.97%	17.23%	17.49%	17.74%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1000 V (IEC) or 1000 V (UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	15 A			
Application Classification	Class A			
Power Tolerance	0 ~ +5 W			

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL DATA / NOCT*

CS6U	330M	335M	340M	345M
Nominal Max. Power (P _{max})	238 W	242 W	245 W	249 W
Opt. Operating Voltage (V _{mp})	34.2 V	34.5 V	34.6 V	34.7 V
Opt. Operating Current (I _{mp})	6.96 A	7.01 A	7.10 A	7.17 A
Open Circuit Voltage (V _{oc})	42.1 V	42.3 V	42.4 V	42.6 V
Short Circuit Current (I _{sc})	7.54 A	7.62 A	7.67 A	7.74 A

* Under Nominal Operating Cell Temperature (NOCT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.


PERFORMANCE AT LOW IRRADIANCE

Outstanding performance at low irradiance, with an average relative efficiency of 96.5 % from irradiances, between 200 W/m² and 1000 W/m² (AM 1.5, 25°C).

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Canadian Solar Inc. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Caution: For professional use only. The installation and handling of PV modules requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the modules.

CS6U-335M / I-V CURVES

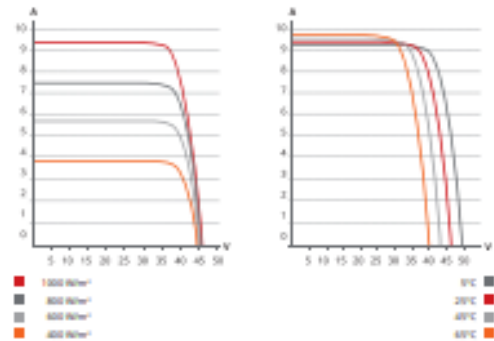

MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline, 6 inch
Cell Arrangement	72 (6 x 12)
Dimensions	1960 x 992 x 40 mm (77.2 x 39.1 x 1.57 in)
Weight	22.4 kg (49.4 lbs)
Front Cover	3.2 mm tempered glass
Frame Material	Anodized aluminium alloy
J-Box	IP67, 3 diodes
Cable	4 mm ² (IEC) or 4 mm ² & 12 AWG
	1000V (UL), 1160 mm (45.7 in)
Connector	T4 (IEC/UL)
Per Pallet	26 pieces, 635 kg (1400 lbs)
Per Container (40' HQ)	624 pieces

TEMPERATURE CHARACTERISTICS

Specification	Data
Temp. Coefficient (P _{max})	-0.41 % / °C
Temp. Coefficient (V _{oc})	-0.31 % / °C
Temp. Coefficient (I _{sc})	0.053 % / °C
Nominal Operating Cell Temperature	45±2 °C

PARTNER SECTION

